



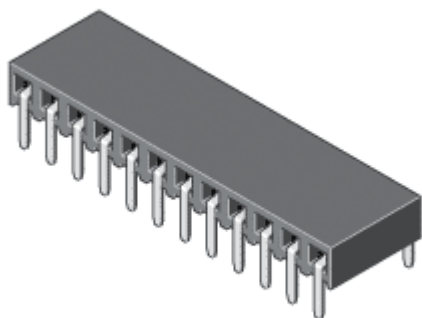


© MPE-GARRY

PCB sockets, solder tail, with precision stamped contacts as side entry version with 8,10 mm housing. With horizontal alignment.

Single row.

Pitch (mm)	2,54
Mating pin size (range)	? 0,64
No of contacts	2
Polarising	No
Locking	No
Material contact	Phosphor bronze
Plating contact	Au
Material insulator	High temp. thermoplast UL94V-0
Rated current	3,0 A
Rated voltage	150 V _{RMS} / V _{DC}
Withstand voltage	500 V _{RMS} / V _{DC}
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds
Packaging	Standard

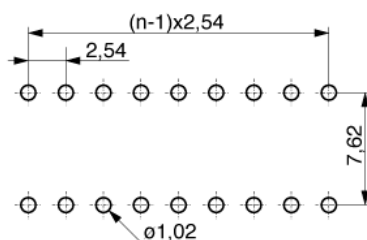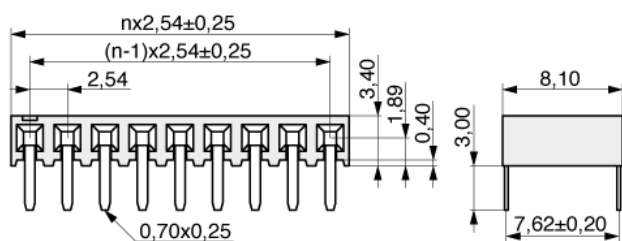

Date: 18.04.2011

Order code: 099-1-002-0-NFX-XS0



MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: vk@mpe-connector.de

Internet: http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=099-1-002-0-NFX-XS0