



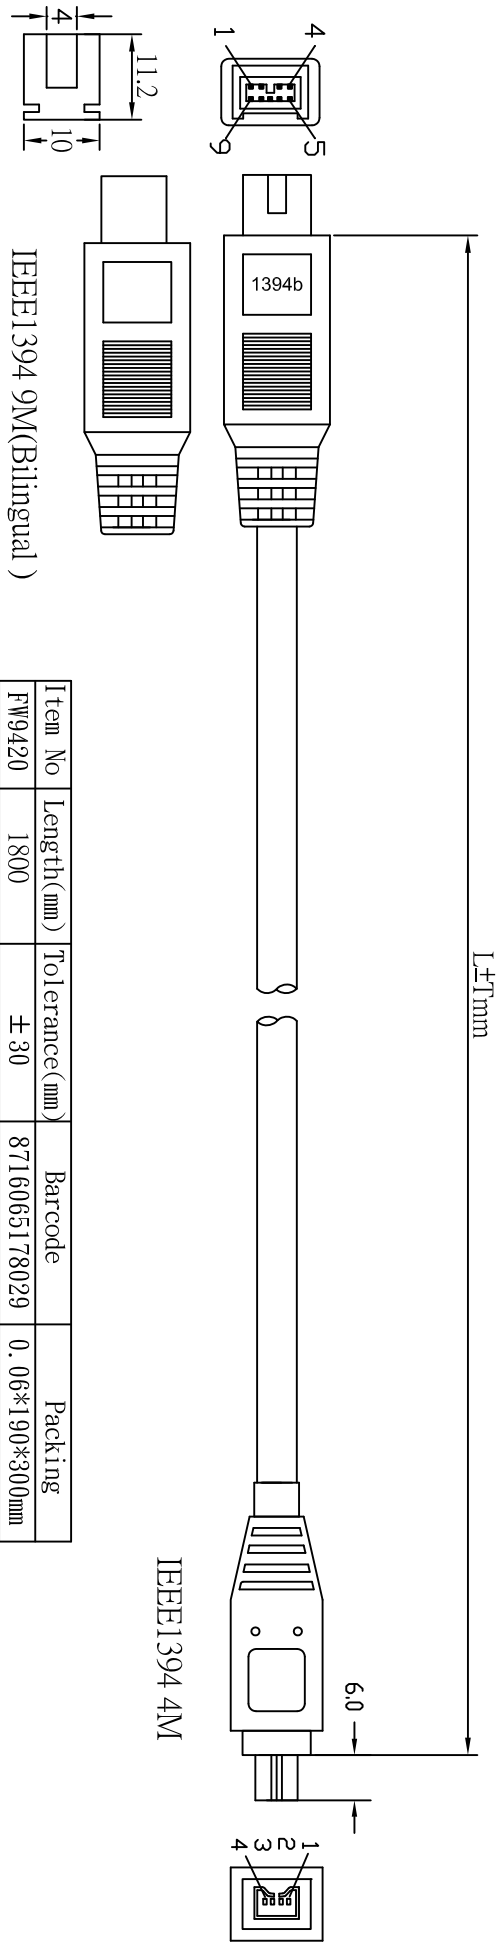

Item No	Length(mm)	Tolerance(mm)	Barcode	Packing
FW9420	1800	± 30	8716065178029	0. 06*190*300mm
FW9430	3000	± 30	8716065178036	0. 06*190*300mm

NOTE:

- 1. CABLE:UL20276,(1P*30#+AB)+26#*2C+MY+MAB90%,BLACK COLOR,OD=5.0mm,PVC JACKET.
- 2. LENGTH:Lmm
- 3. CONNECTOR:IEEE1394 9M*1PCS(Bilingual),IEEE 1394 4M*1PCS.(BLACK INSULATOR)
- 4. MOLD:IEEE1394 TYPE.
- 5. CONTACTS:

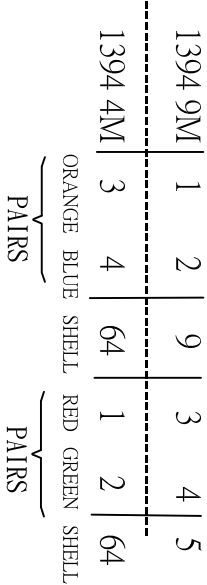

- 6. OPEN/SHORT TEST: 100% TEST.
- INSULATION: 5M.

RoHS COMPLIANT.

Company	IBV	Goods Code	Draw	FC001 JACK	Date	2011.08.27	D	
ITEM NO.	FW94X0	Drawing Evidence:	Check		Date		C	change to MAB 90%
Goods NO.			Approval		Date		B	add 26# and change color
Original NO.	K-2807004	Unit(mm)			Date		VER. A	REVISE
								20111103 K006
								20111101 K006
								Date

1PCS/PE BAG(0.06*190*300mm)+STICKER

