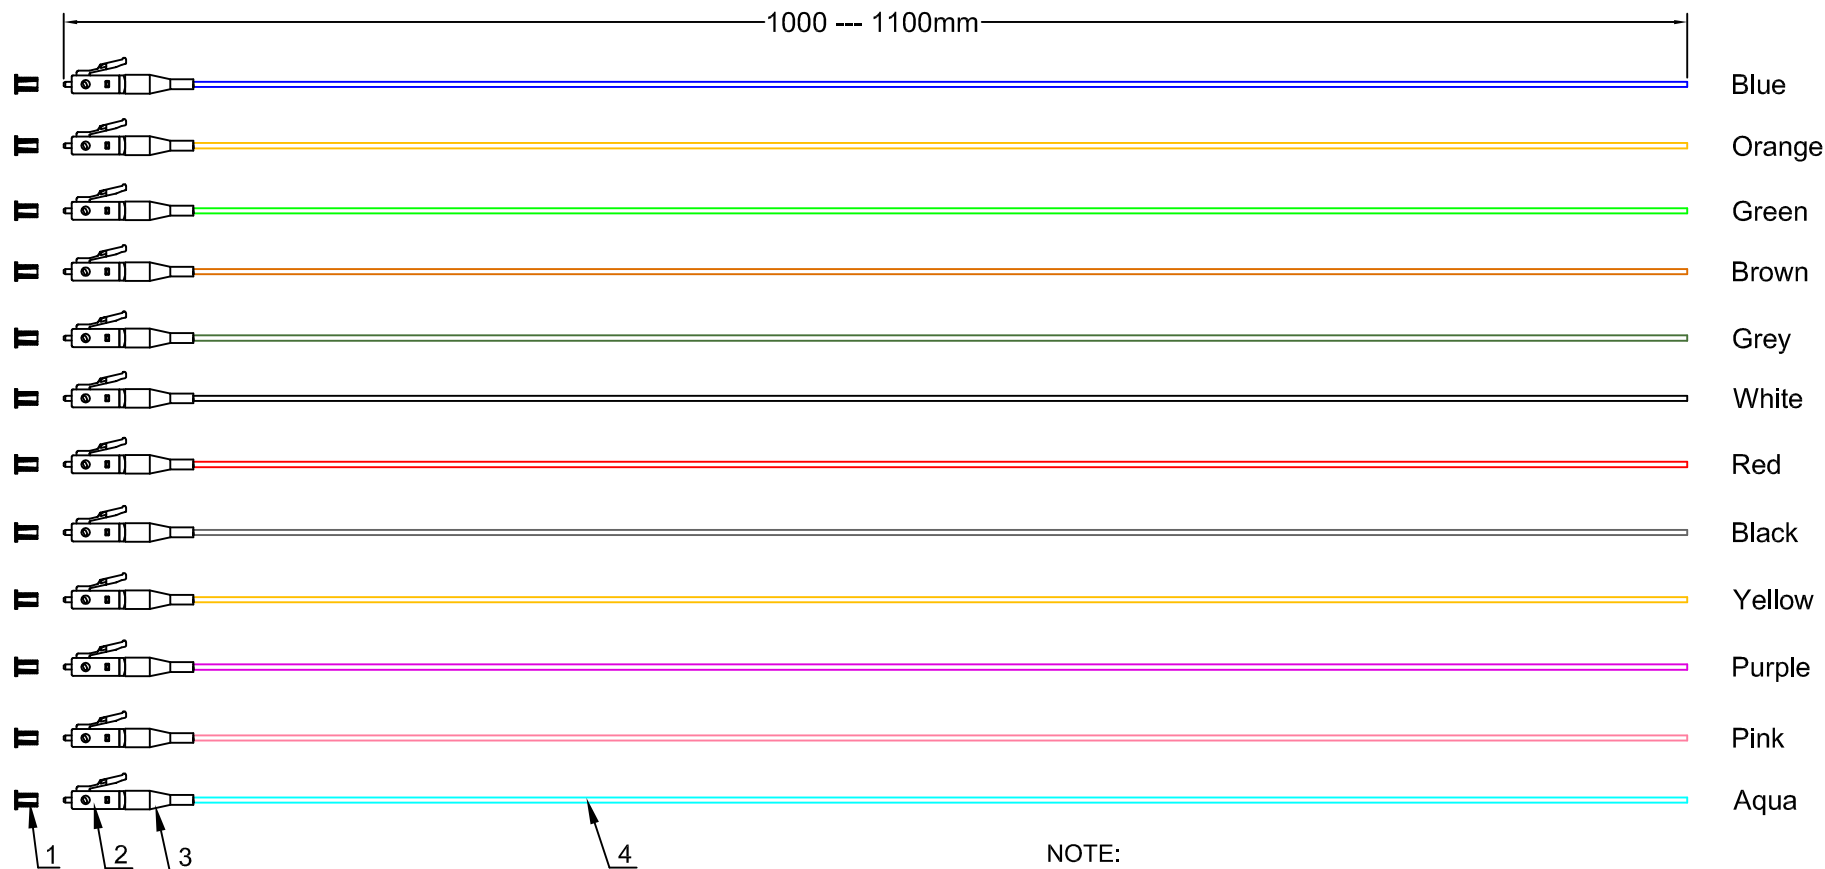


NOTE:

- 1.Insertion loss Typical :0.15dB λ : 850&1300nm
 Insertion loss Max:0.3dB λ : 850&1300nm
 Return loss Min :30dB λ : 850&1300nm
- 2.Durability:500 matings
- 3.Operation temperature:-40°C to +85°C
- 4.LC connector according to IEC 61754-20

**ROHS
Compliant**

LC/PC --- Pigtail OM3 0.9mm semitight buffer LSZH 12 colors		
ITEM	Description	Q'TY
1	LC dust cover white	1 PC
2	LC/PC MM simplex connector beige	1 PC
3	LC Boot beige	1 PC
4	OD=0.9mm simplex OM3 fiber optical cable LSZH 12 colors	1 PC

AC

Designed by:	Yong Yu	Audit:	Qihua Cheng
Date:	2018-03-02	Approve:	Yong Huang
Unit:	mm	Sheet:	A4
Product Name:	LC OM3 12 pack RL9680		
Drawing NO:	SOP-ED-180228-02-V2		