


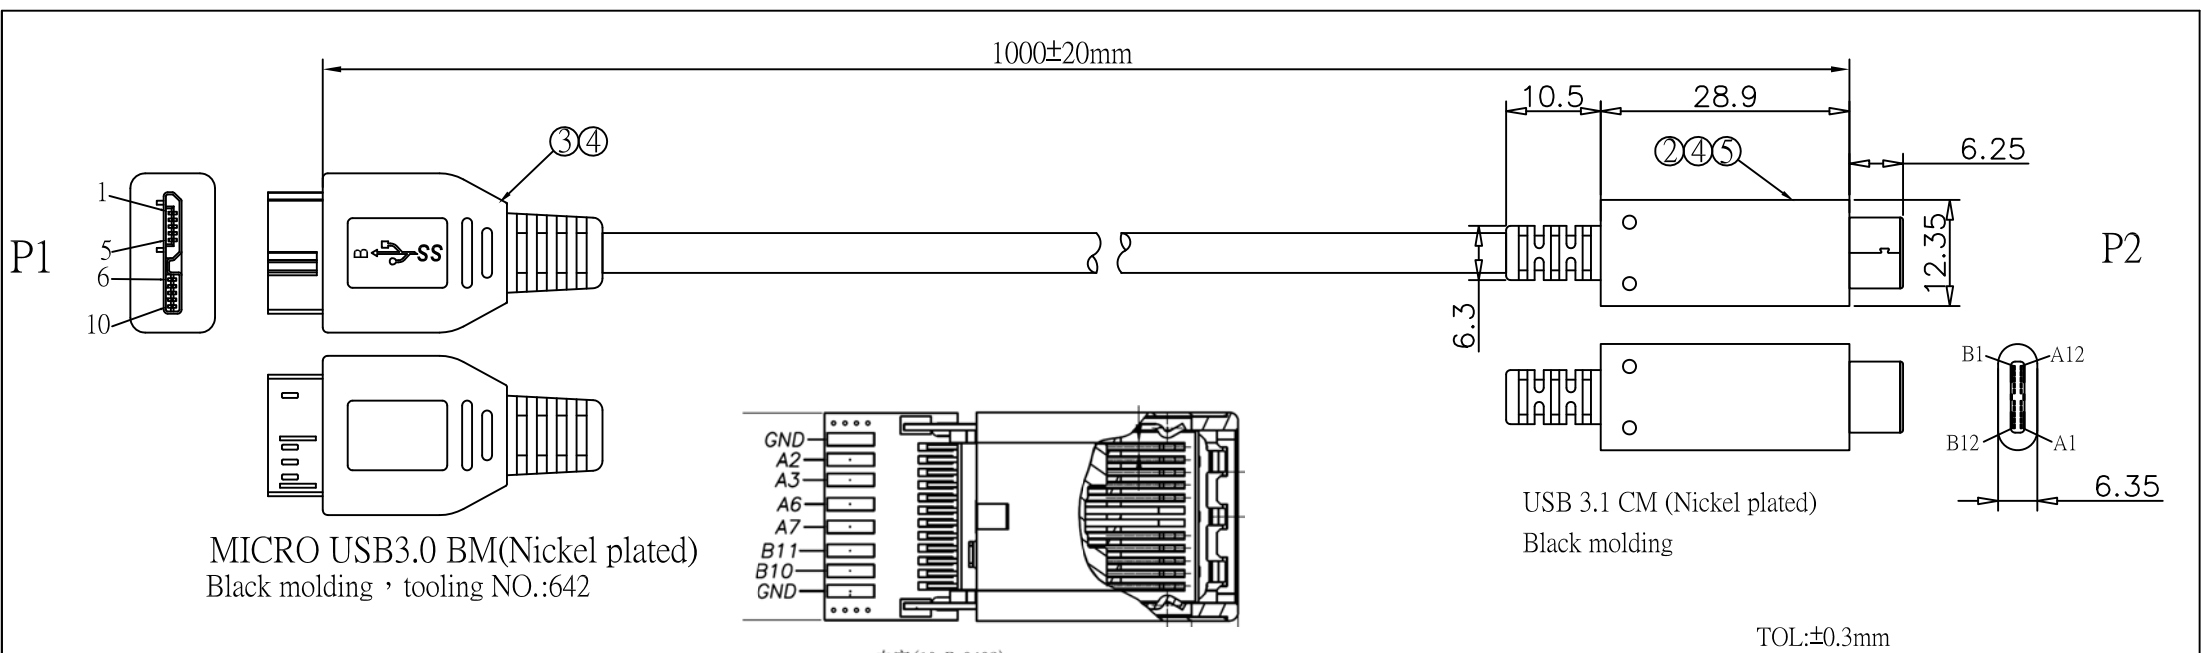

MICRO USB3.0 BM(Nickel plated)
Black molding , tooling NO.:642

USB 3.1 CM (Nickel plated)
Black molding

TOL:±0.3mm

Input:5V
Load:4.75V
Lod Crrnt:900mA

OPEN/SHORT TEST: 100% TEST.
INSULATION: 5M.

CONTACTS:

P1	1	2	3	5+8	6	7	9	10	64
PCB	VBUS	A7	A6	GND	B10	B11	A3	A2	64
P2	A4+B4+A9+B9	A7	A6	A1+B1+A12+B12	B10	B11	A3	A2	64
Wire	Red	Green	White	Black	Blue	Yellow	Orange	Purple	Drain

⑤	PE	12g
④	45P Black PVC	25g
③	MICRO USB 3.0BM(Black insulator , Nickel plated)	1PCS
②	USB3.1 C Type(Black insulator , Nickel plated)	1PCS
①	UL20276 (32#*1P+D+AL+Mylar)*2+32#*1P+26#*2C+AL+B(16*5/0.10TA) OD=4.0mm Black PVC Jacket.	1PCS
No.	Description	Qty

Company		Goods Code		Draw	QMQ	Date	2015.3.10	D		
ITEM NO.	SB0013	Drawing Evidence		Check		Date		C		
Goods NO.				Approval		Date		B		
Original NO.		Unit(mm)						VER. A	REVISE	Date

