


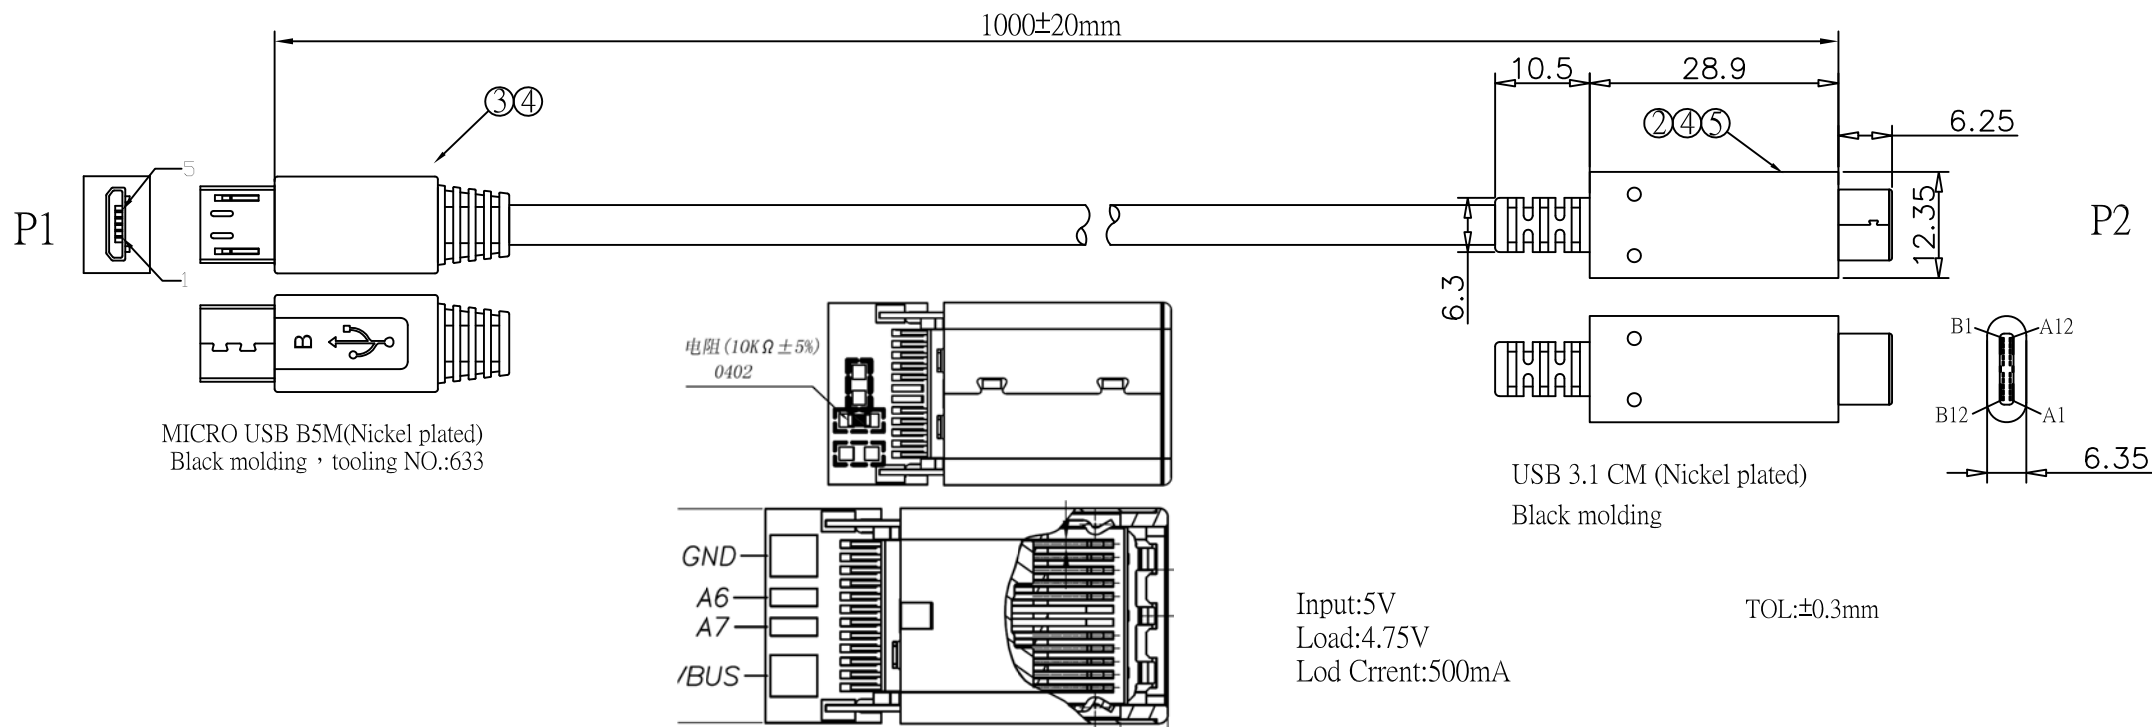

OPEN/SHORT TEST: 100% TEST.
INSULATION: 5M.

CONTACTS:

P1	1	2	3	5	64
PCB	VBUS	A7	A6	GND	64
P2	A4+B4+A9+B9	A7	A6	A1+B1+A12+B12	64
Wire	Red	White	Green	Black	Drain

⑤	PE	12g
④	45P Black PVC	25g
③	MICRO USB 2.0 BM(Black insulator , Nickel plated)	1PCS
②	USB3.1 C Type(Black insulator , Nickel plated)	1PCS
①	UL2725 28#*1P+28#*2C+AL+D+B(16*5/0.12AM) OD=3.5mm Black PVC Jacket.	1PCS
No.	Description	Qty

Company		Goods Code		Draw	QMQ	Date	2015.6.18		D		
ITEM NO.	SB0015	Drawing Evidence		Check		Date			C		
Goods NO.				Approval		Date			B		
Original NO.		Unit(mm)							VER. A	REVISE	Date

AC