
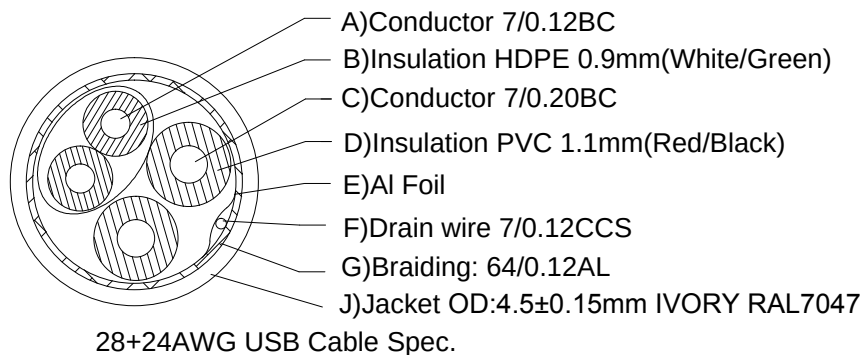
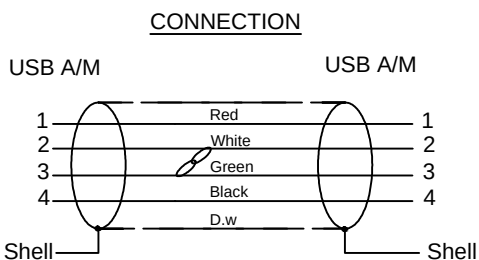


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2018/08/10	

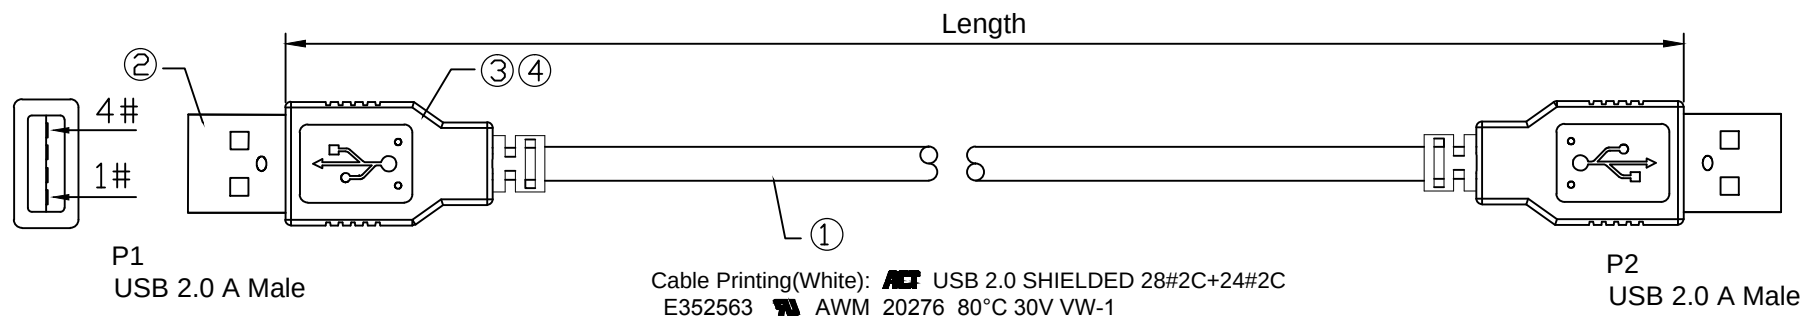

Remark:

- 1.100% Open/Short Test
2. Conductive Resistance: 2ohms MAX
3. Insulation Resistance: 5M ohm MIN.
4. The product is Reach/RoHS compliant.




Item NO.	Length(m)
SB2502	2.0m
SB2503	3.0m

③	External Mold	Outer Mold 45P PVC, IVORY RAL7047	2PCS	
②	Connector	USB A Male, Nickle-Plated	2PCS	
①	Cable	28+24 USB Cable OD:4.5mm 28+24 (7/0.12BC+HDPE)*1P + (7/0.20BC +PVC)*2C+7/0.12CCS+64/0.12ALB +OD4.5PVC IVORY RAL7047		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK

TOLERANCES UNLESS OTHERWISE STATED
X. = ± 1
.X = ± 0.2
.XX = ± 0.1

ACT			
ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION		PAGE NO	1/1
28+24 USB A Male TO A Male		DATE	2018/08/10
APPROVAL		CHECKED	
		DRAWN	

REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2021/01/27	

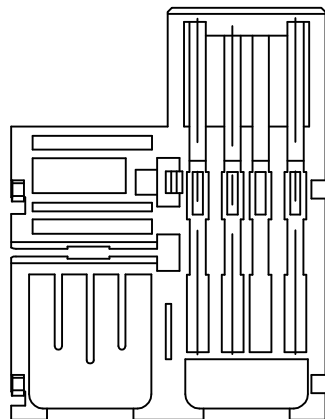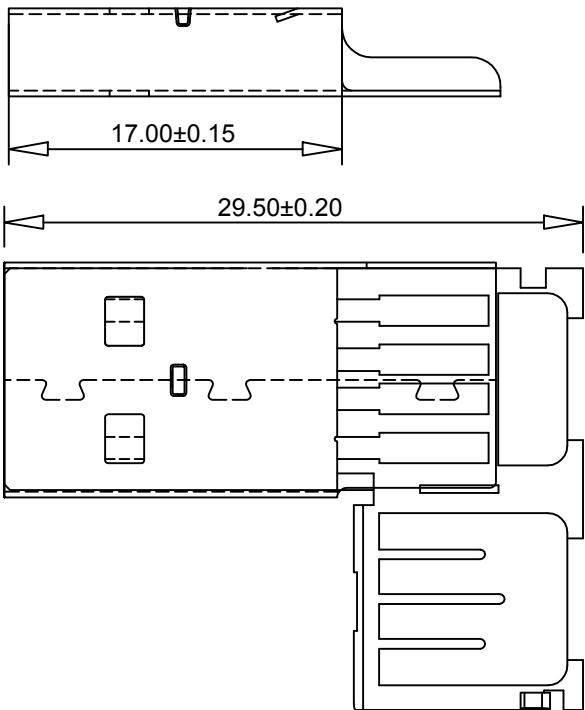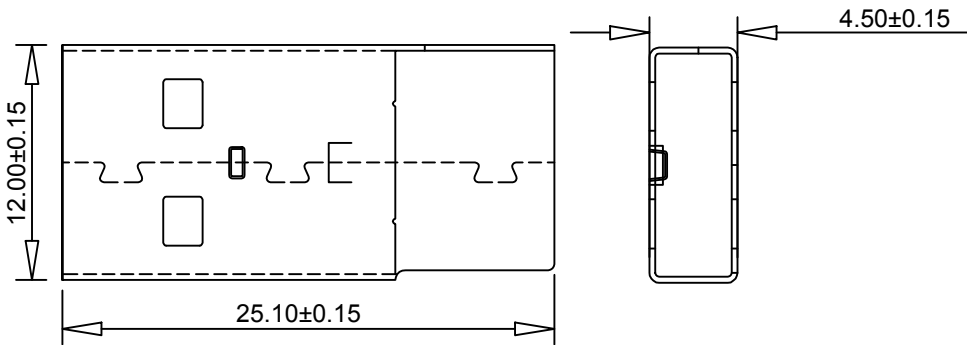

ERP NO.:				SAMPLE DWG NO.:	
ACT No.:				REVISION	
CUSTOMER:				UNIT	
CUSTOMER P/N:				SCALE	
DESCRIPTION				PAGE NO	
				DATE	
APPROVAL		CHECKED		DRAWN	