


SPECIFICATION SHEET

Product Code	PA195010, PA195015
---------------------	--------------------

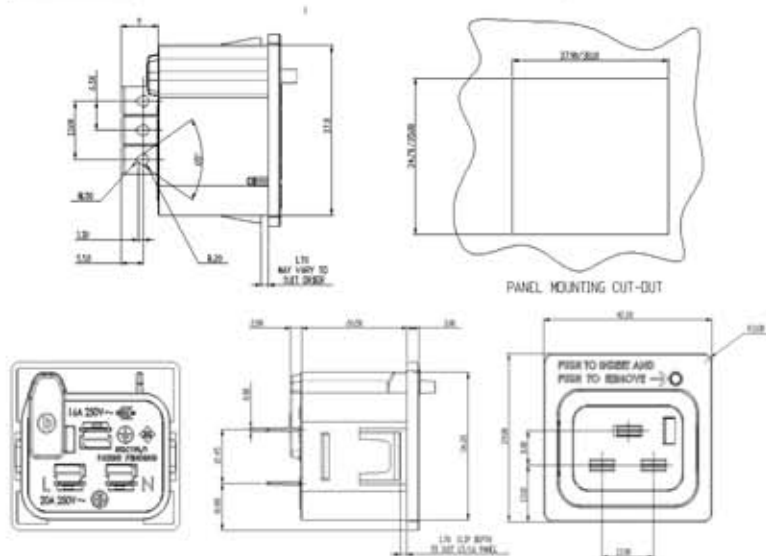

General Information	
Features	Snap-in mounting from front. Solder terminal or quick connect from single terminal. Protection class 1. Integral plug retention feature.
Technical Data	
Rating	16A/250VAC
Insulation Resistance	10MΩ (500VDC, 1 Min.)
Dielectric Strength	2KV (50Hz 1 Min) to accessible surfaces
Materials	Socket: Black Thermoplastic UL94V-0
Patent	
UK Number	2463468B
EU Number	EP2321879A
HK Number	HK1141901
Chinese Patent Application Number	CN 102150330 A
Products	
Part Reference Number	DescriptionTerminal Type
PA195010BK	Black IEC320 C19 Snap in 1mm Panel ThicknessQuick Connector/Solder 6.3 x 0.8mm
PA195015BK	Black IEC320 C19 Snap in 1.5mm Panel ThicknessQuick Connector/Solder 6.3 x 0.8mm
PA195010WH	White IEC320 C19 Snap in 1mm Panel ThicknessQuick Connector/Solder 6.3 x 0.8mm
PA195015WH	White IEC320 C19 Snap in 1.5mm Panel ThicknessQuick Connector/Solder 6.3 x 0.8mm
Other Information	
Standards	IEC/EN 60320-2-2/F UL498 CSA C22.2 No 182.3-M1987
Approvals	16 A/250VAC 20 A/250VAC
   	