




SER5037T

2 ports RS-232 Universal PCI
Serial Board

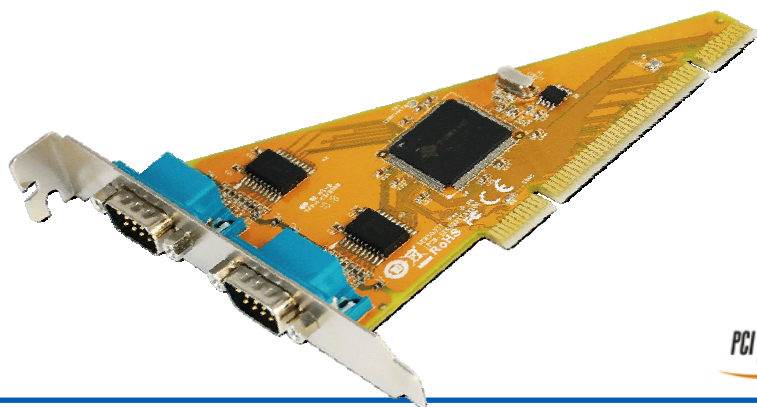

Introduction

SUNIX SER5037T, Universal PCI serial communication board, allows users to add or expand two RS-232 ports on PC-based system. The card is compatible with both 64 / 32-bit PCI architecture supporting 3.3 and 5V Bus, allowing it to be installed in virtually any PC-based systems. SUNIX SER5037T card has 128-bytes onboard FIFO buffer and compatible with 16C950 UART specification. SUNIX GoldenIO card series is designed with SUNIX UART controller, SUN1989 and as well built with many of SUNIX advanced features and technologies, making it the best solution for commercial and industrial automation applications.

Features

- Expands 2 independent RS-232 serial ports with communication speeds up to 115.2Kbps.
- High speed SUN1989 16C950 compatible UART controller on-board.
- Compliance with PCI 33MHz Ver 3.0, 2.2 & 2.1 specifications.
- Supports both 64-bit & 32-bit PCI bus slot and 3.3V & 5V power.
- On-chip hardware auto flow control to guarantee no data loss.
- Built-in ± 2 KV ESD protection for all serial signals.
- Plug-n-Play, I/O address and IRQ assigned by BIOS.
- Certified by CE, FCC, RoHS, and Microsoft WQHL approval.
- Support Microsoft Windows, Linux, and DOS.



Specifications

Serial Communication

Interface	RS-232	Signal	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND, RI
Controller	SUNIX SUN1989 (16C950 UART Compatible)	Baud rate	50bps ~115.2Kbps
BUS	Universal PCI 64/32bit 3.3V/5V PCI Ver 3.0, 2.3, 2.2, 2.1	Stop bit	1, 1.5, 2
No. of Port	2-port	Parity	even, odd, none, mark, space
IRQ & IO	Assigned by System	Flow Control	None, Xon/Xoff, RTS/CTS
FIFO	128byte Hardware	PCB Connector	DB9 Male
Protection	±2KV ESD protection for each signal Human Body Model (HBM)		

Driver Support

Microsoft Client	Windows XP/Vista/7 (X86/X64)
Microsoft Server	Windows 2000/2003/2008 (X86/X64)
Microsoft Embedded	Windows CE5.0/6.0/XP Embedded/POS Ready 2009/Embedded System 2009
Linux	Linux 2.4.x/2.6.x
DOS	DOS
FreeBSD	FreeBSD 5.3~5.5 / 6.0~6.4
QNX	QNX 6.3.2/6.4.0
* IBM OS/2	WARP 3/WARP 4
* SCO UnixWare	UnixWare 7.1.3/7.1.4/ Open Server 5.0.7/6.0
* Sun Microsystems	Solaris 10
Note : " * " Supported by special inquiry.	

Regulatory Approvals

Hardware	EN55022 Class B, EN55024, EN61000-3-2, EN61000-3-3, FCC Part 15 Class B, BSMI: CNS13438, C-Tick: CISPR22 AS/NZS, RoHS
Software	Microsoft WHQL Windows ◆ Microsoft Client: XP/Vista/7 (X86/X64) ◆ Microsoft Server: 2000/2003/2008 (X86/X64)

Environment


Operation Temperature	0 to 60°C (32 to 140°F)
Operation Humidity	5 to 95% RH
Storage Temperature	-20 to 85°C (-4 to 185°F)

Dimension


PCB Dimension	120 x 84 mm
Bracket	Standard 121 mm
Bracket Space	1



Application

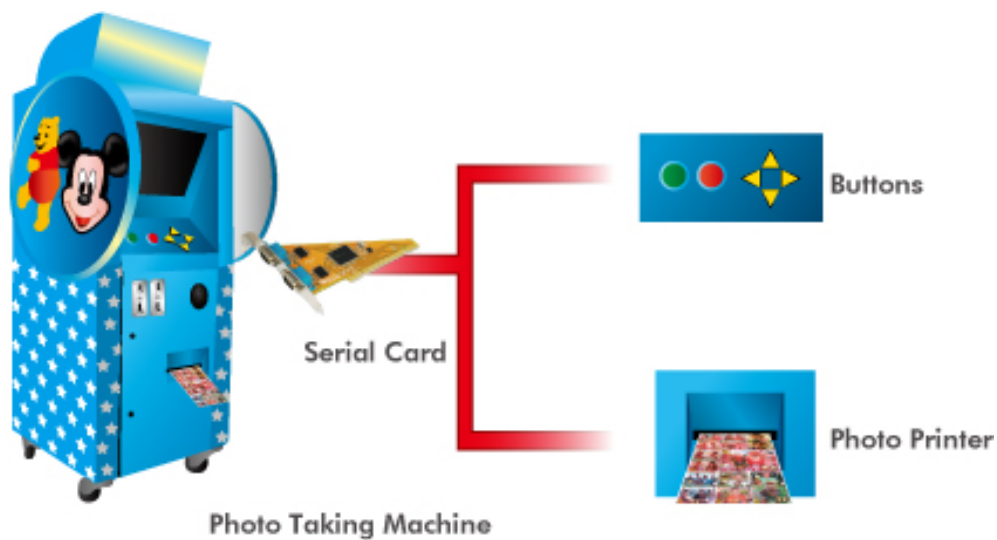


Mechanical Drawings (Unit = mm)

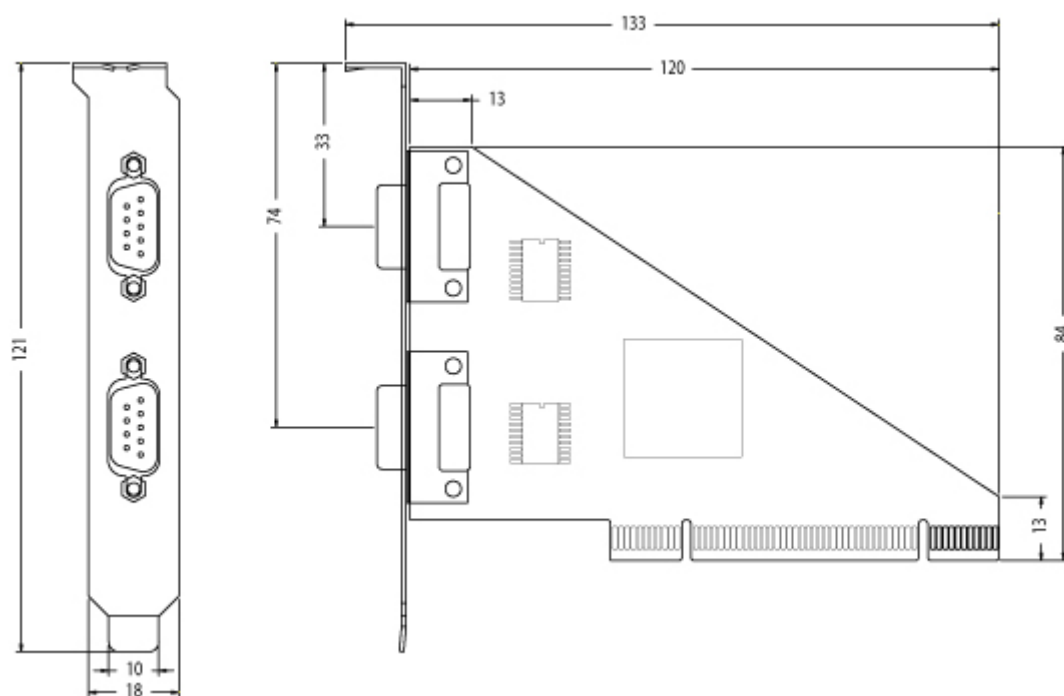



Pin Assignment



PIN	DB9M
DCD	1
RxD	2
TxD	3
DTR	4
GND	5
DSR	6
RTS	7
CTS	8
RI	9

Packing List

Packing Content

- SER5037T - 2 ports RS-232 PCI Serial Board
- Quick Installation Guide
- Software CD ROM

