



# HDMI Splitter/Extender via UTP Cables

Display one HDMI source up to 4 screens over UTP cables

Cable

AB7812 EAN: 8716065328936

Packaging contents: AB7812, Power supply 5V 4A, Quick Install Guide

#### **OVERVIEW**

- 1 x 4 HDMI splitter 50m single UTP cable, 3D support
- Display 1 source on 4 different screens with a distance up to 50 meters
- Splitter with built-in extension
- For use with AB7813 HDMI receiver
- Maximum (3D) resolution: 1080p @ 30/60Hz
- Suitable for use with UTP cables
- Compatible with HDMI High Speed (HDMI 1.4a)
- Power adapter included

Splitter for use with AB7813



#### **SPECIFICATIONS**

- Power consumption: 12W
- Power input: 5V 4A
- Transmission Distance: max. 50m. over single Cat6 UTP cable
- Maximum HDMI input/output cable length: 5M
  Supported resolutions 50/60hz compatible: 480i/576i/480P/576P/720P/1080i/1080P
- Supported 3D format: 1080p@30/60hz
- Audio Passthrough: DTS-HD MA, Dolby True-HD, Dolby Digital.
- HDMI standard: HDMI High Speed
- Dimensions in mm. (WxHxD): 180x85x38

Nederlandstalige helpdesk Service en français Nederlandstalige handleiding Manual en français

• Weight in grams: 520g

EN 5 Years Warranty NL 5 Jaar garantie

English Helpdesk English Manual



Deutschsprachige-Helpdesk Deutschsprachige Handbuch

FR 5 Ans de garantie IT Garanzia di 5 anni DE 5 Jahre Garantie

Helpdesk in italiano Manuale in Italiano ES 5 Años de Garantia HU 5 év garancia

Magyar Helpdesk Magyar Használati Utasítás

Soporte en español Manual en español PT 5 anos de garantia PL 5 lat gwarancji

Helpdesk Manual em Português Wsparcie techniczne Instrukcja obsługi

1



#### HDMI Splitter/Extender via UTP Cables


Display one HDMI source up to 4 screens over UTP cables

## DESCRIPTION

The Eminent AB7812 HDMI Splitter/Extender extends a single HDMI signal over a distance up to 50 meters. Play one presentation or movie on various locations for example at the reception or cafeteria area in an office. The AB7812 works in combination with the AB7813 HDMI Receiver Set. Use a UTP cable for a perfect performance in (3D) 1080p @ 30/60Hz resolution.

#### Display a single video source on multiple screens

You want to display your company presentation on multiple TVs at the reception or cafeteria area in your office? The Eminent AB7812 Extender and AB7813 Receiver Set are the perfect solution. The AB7812 extends the HDMI signal from your source device and enables you to display your video up to four target screens without compromising image quality. The AB7813 set contains two receivers for connecting two TVs/screens. Up to four receivers can be connected to the AB7812 Splitter.

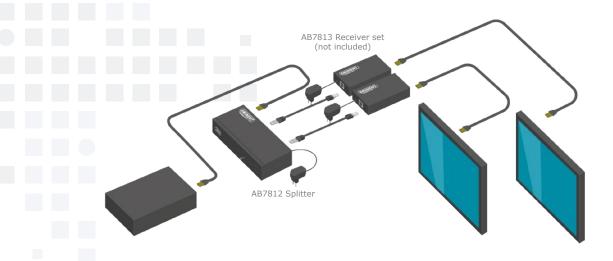

#### **Connecting your devices**

EN 5 Years Warranty NL 5 Jaar garantie

Nederlandstalige helpdesk Service en français Nederlandstalige handleiding Manual en français

English Helpdesk English Manual

Connect the AB7812 Extender with an HDMI High Speed cable to your HDMI source. Connect the AB7813 Receiver to a TV with an HDMI High Speed cable. Use a UTP cable to connect the AB7812 Extender to a AB7813 Receiver with a maximum length of 50 meters. The extender and the receivers come with additional AC Adapters.



Deutschsprachige-Helpdesk Deutschsprachige Handbuch

ES 5 Años de Garantia HU 5 év garancia

Magyar Helpdesk Magyar Használati Utasítás

Soporte en español Manual en español

FR 5 Ans de garantie IT Garanzia di 5 anni DE 5 Jahre Garantie

Helpdesk in italiano Manuale in Italiano PT 5 anos de garantia PL 5 lat gwarancji

2


czne



### **HDMI Splitter/Extender via UTP Cables**

Display one HDMI source up to 4 screens over UTP cables

IMAGES

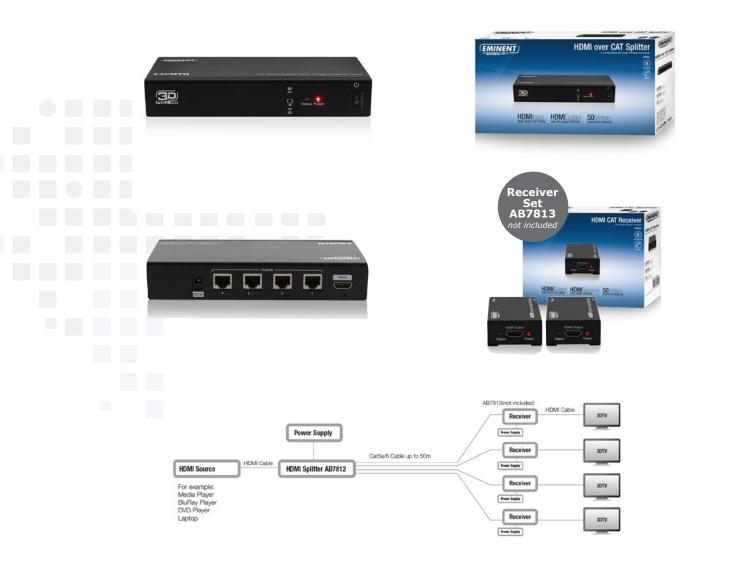



EN 5 Years Warranty NL 5 Jaar garantie

Nederlandstalige helpdesk Service en français Nederlandstalige handleiding Manual en français

English Helpdesk English Manual ES 5 Años de Garantia HU 5 év garancia

Magyar Helpdesk Magyar Használati Utasítás

Soporte en español Manual en español

Deutschsprachige-Helpdesk Deutschsprachige Handbuch

FR 5 Ans de garantie IT Garanzia di 5 anni DE 5 Jahre Garantie

Helpdesk in italiano Manuale in Italiano 3