

Switching Software Client for Windows/Mac included!

HDMI and HDCP compliant

USB 2.0 compliant for keyboard, mouse and high-speed USB device

2-port Compact Desktop HDMI USB KVM Switch w/ IR Remote Control
Push button, keyboard hotkeys and Switching Software client for switching operation

2-port Compact Desktop HDMI USB KVM Switch w/ IR Remote Control

The 2-port Compact Desktop HDMI USB KVM Switch with IR remote control allows you to access, control, boot and reboot two HDMI-enabled multimedia computers with only one USB keyboard, mouse, monitor and optional speaker set, using the Switching Software Client installed on your PCs or Macs. It is also enabled with IR remote control, so that you can select your computer using the IR remote controller.



HDMI and HDCP compliant for High-Definition video enjoyment

This HDMI USB KVM Switch supports biggest resolution up to 1080p (HDTV) /1920 x 1200 (DVI Digital Video). It also supports HDCP (High-bandwidth Digital Contents Protection).

Switching Software Support for PC and Mac

The 2-port Compact Desktop HDMI USB KVM also provides Switcher Software for PC and Mac. The software switcher can show you the current active computer and allows you to select computer as well as configure keyboard hotkeys. It appears as an icon on the system tray of your Window/Mac desktop, and will change its number icon upon switching to show the active computer port. Using this small client software, it will give KVM users utmost convenience and control.

Multi-channel audio support


The HDMI interface has integrated multi-channel audio within and hence users can enjoy high-definition sound that comes from a single HDMI cable. The UHV-CP02A allows you to leverage the multimedia systems on each of your two HDMI-enabled computers. You can monitor the audio input of each computer for maximum convenience.

USB 2.0 compliant for USB keyboard, mouse and high-speed device sharing

The USB 2.0 interface offers multi-platform support for PC, Macintosh G3/G4, iMAC and PowerBook. In addition to the usual connections of a set of USB keyboard and mouse, the two USB 2.0 hub ports can also be connected to a high-speed USB device such as USB storage or webcam, etc. The KVM Switching Software client supports both Windows/Mac platforms.

Features

- 2-port Compact Desktop HDMI USB KVM Switch with IR Remote Control
- Compatible to HDMI-enabled HDTV/LCD/Plasma Display
- IR remote switching control
- Support multi-channel digital audio
- USB console support for USB keyboard, mouse and high-speed USB devices
- HDMI 1.3b and HDCP and DVI specifications compliant
- Video bandwidth up to 165 MHz (1.5 Gbps)
- Supports HDTV resolutions: 480i, 576i, 480p, 576p, 720p, 1080i and 1080p / 1920 x 1200 (DVI-D)
- Supports transmission distances of up to 30m (max. 15m in, 15m out)
- USB 2.0/1.1 specification compliant
- Multi-platform support for PCs and Macintosh G3/G4, iMAC
- Switching Software client for easy software switching on Windows and Mac platform
- User definable hotkeys
- Additional universal port switching hotkey – ScrollLock + ScrollLock – for non-Windows OS on PC platform.
- Channel selection by push button, keyboard hotkeys and Switching Software Client (for Windows/Mac)
- LED indicators for easy status monitoring

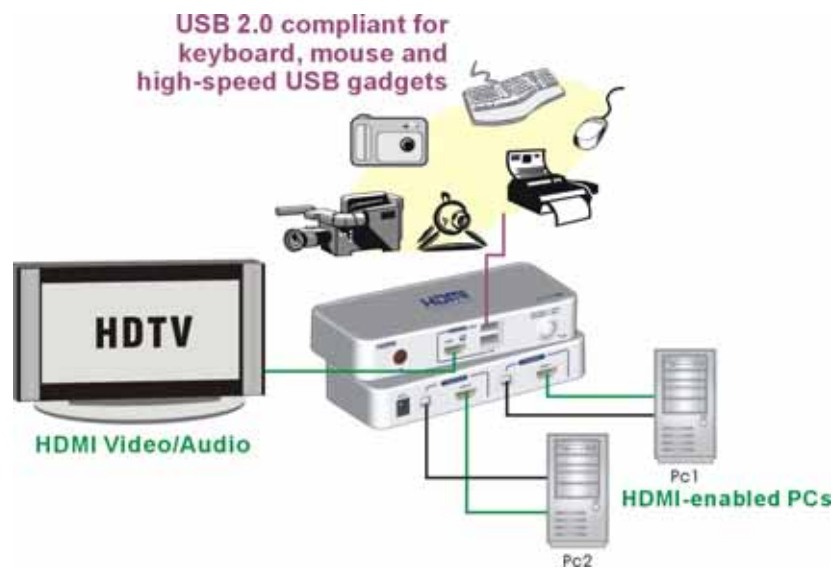

Specifications

Model No.	2-port Compact Desktop HDMI USB KVM
Computer Connections	2 (HDMI-enabled computers)
Console Connections	1
Cables	2 x detachable HDMI Cable 2 x USB cable
PC Port Connectors	2 x USB Type B 2 x HDMI female
Console Port Connectors	2 x USB Type A (Keyboard & Mouse & USB 2.0/1.1 Devices) 1x HDMI female
PC selection	Push button Hotkeys Switching Software (for Windows/Mac)
PC port LED	2 x (Green – PC1 / Blue – PC2)
VGA Resolution	1080p (HDTV) / 1920 x 1200 (DVI digital)
Power Type	DC 5V2A power receptacle
Size	Compact Desktop
Housing	Plastic
Dimension (L x W x H)	160 x 68 x 26 mm
Safety / Emission	FCC, CE