

Auto switch for easy USB sharing among multiple PCs
USB share status indicated by software icon
Auto / Manual sharing mode selectable

UAS-002/UAS-004 USB Auto Switch

In today's SOHO/Home office environment, it will pose a special problem if you want to share a USB device among multiple computers without the benefit of a network. With a simple installation of the USB Auto Switch, users can easily achieve efficient USB device sharing among several computers, without pains and toils of constantly changing USB cables connections. All this is done intelligently by the working of its smart USB Autoswitch utility that knows when and how to allocate USB resource efficiently to satisfy every connected computer's demand.



UAS-002 – Front View



UAS-004 – Front View



UAS-002 – Rear View



UAS-004 – Rear View

Autoswitch utility software for hassles-free USB sharing


The Auto Switch software utility works seamlessly with the USB Auto Switch to serve users, based on a FCFS (First Come, First Serve) basis. The utility assign priority to each USB request coming from different computers, and queue and control and manage all these tasks in clear and clean sequence. Users will no longer have to worry about someone switching off their USB connection while printing a very important document on the shared USB printer. In addition to the Auto mode, the Manual mode can also be applied as an available option. It's easy to switch between Auto Mode and Manual Mode -- you just press the Switch button on front.

With this USB Auto Switch, you can forget all the troubles and use the USB device just like you have it directly connected to your computer while every user will be happily served.

Features

- 2/4-port USB Auto Switch
- Auto Switch software utility for task control and management
- The shared USB device status (idle/occupied/available) is indicated by a system icon on Windows system tray
- Idle time configurable (timeout before the shared USB port is made available again after a job is finished)
- Support high speed(480Mbit/sec),full speed(12Mbit/sec),low speed(1.5Mbit/sec)
- Bus-powered without the need of using external power supply
- Full Plug & Play support
- Both Auto switch mode & Manual switch mode are available
- Switch status display by system tray icon
- Compatible with Windows98SE2/ME/2000/XP/Vista (Mac OS,LINUX,SUN – only support with manual switch mode)

UAS-004

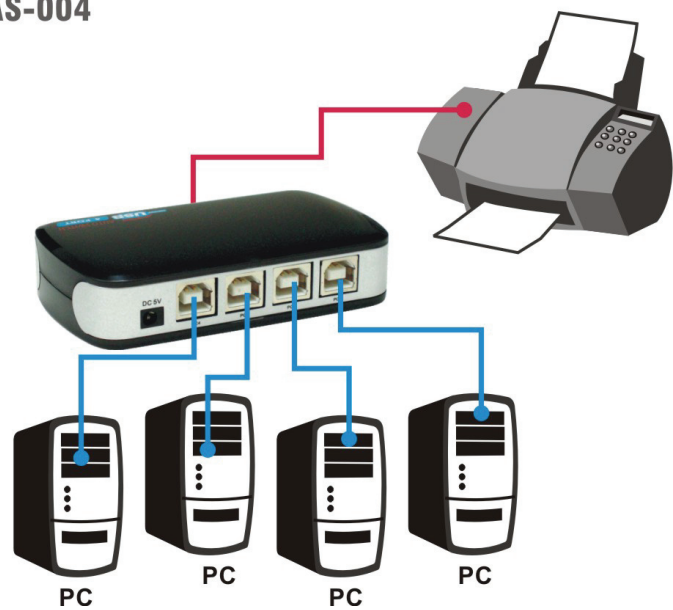

Specifications

Model No.	UAS-002/UAS-004
Computer Port	2/4 x USB type B
Device Port	1x Type A
Transmission rate	High speed(480Mbit/sec) Full speed(12Mbit/sec), Low speed(1.5Mbit/sec)
USB sharing mode	Auto mode (required AutoSwitch utility installed on computer) / Manual mode
Computer port LED	2/4
Power LED	1
Power Type	Bus powered
Power Adapter	(Optional) 5V 2A
Size	Mini Desktop
Housing	Plastic
Dimension (L x W x H)	95.5 × 55.8 × 22 mm
Safety / Emission	FCC, CE