

HDMI over IP Extender - set

www.act-connectivity.com



Bullets

- Extend your HDMI signal via your IP network
- IR support for remote controlling A/V devices
- Supports point-to-point and point-to-multipoint by using multiple receivers
- Maximum resolution 1080p @ 60Hz
- Integrated mounting bracket

Technical specs

Stream rate : 90Mbps
Compression : MJPEG
UTP Port : 100 Mbit

Supported resolutions 50/60hz compatible : 480P/720P/1080i/1080P

IR support : IR-RX (receiver) / IR-TX (transmitter)

IR-RX cable length:110cmIR-TX cable length: 110cmSupported Audio: 2CH Stereo

HDMI standard : HDMI High Speed

Power consumption : 3W
Power supply : 5V 1A
Dimensions in mm. (WxHxD) : 92x20x79
Weight in grams : 460g (set)

Story

The AC7850 HDMI over IP set allows you to extend an HDMI signal via your home IP network with a maximum resolution of 1080p @ 60Hz. The extender set contains a transmitter and a receiver and supports point-to-point and point-to-multipoint.

Use an HDMI cable to connect the transmitter to a source device and use an HDMI cable to connect the receiver to a TV/monitor. It is not necessary to install new UTP cables. Use your existing home IP network and UTP cables to connect both the transmitter and receiver to a router/switch. The AC7850 Transmitter and receiver have an integrated mounting bracket. The set comes with IR support for remote controlling your connected A/V device.

For point-to-multipoint you need the optional HDMI over IP receiver (AC7851).




HDMI over IP Extender - set

www.act-connectivity.com





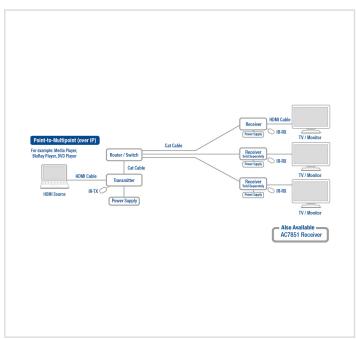



SKU	EAN	SHORT PRINT DESCRIPTION
317.0	LAN	JIIOKI FKINI DEJCKIF HON

AC7850 8716065403541 HDMI over IP extender set UTP up to 100 meter