


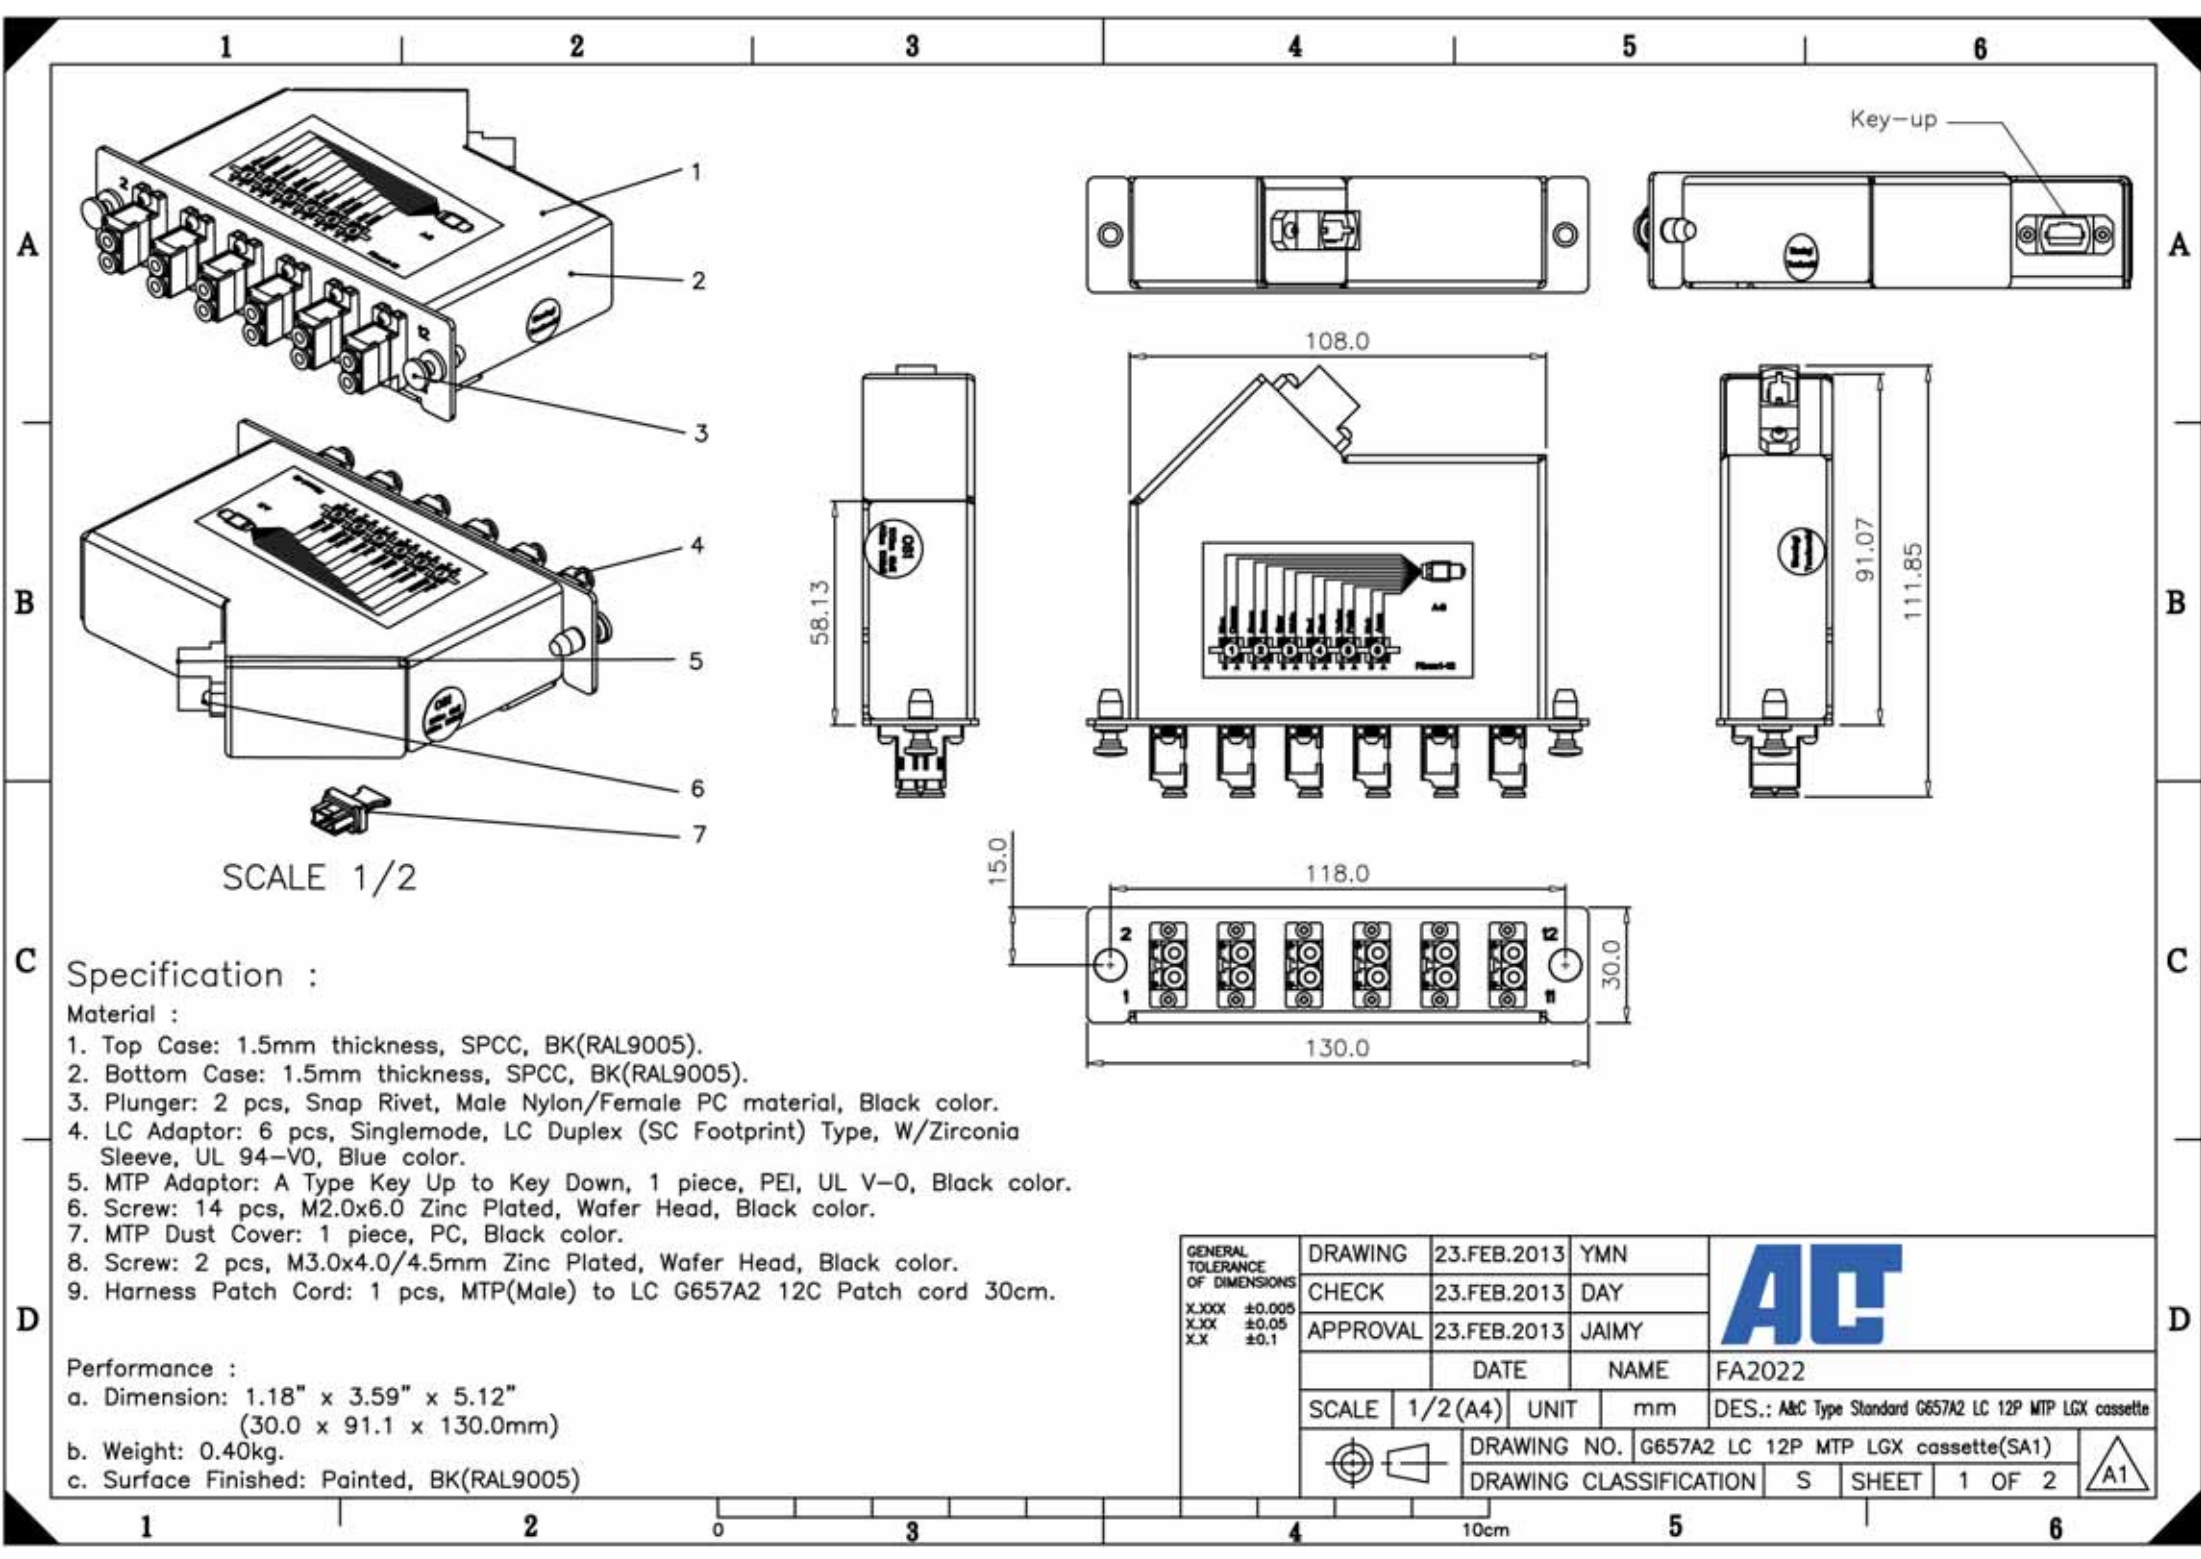

C Specification :

Material :

1. Top Case: 1.5mm thickness, SPCC, BK(RAL9005).
2. Bottom Case: 1.5mm thickness, SPCC, BK(RAL9005).
3. Plunger: 2 pcs, Snap Rivet, Male Nylon/Female PC material, Black color.
4. LC Adaptor: 6 pcs, Singlemode, LC Duplex (SC Footprint) Type, W/Zirconia Sleeve, UL 94-V0, Blue color.
5. MTP Adaptor: A Type Key Up to Key Down, 1 piece, PEI, UL V-0, Black color.
6. Screw: 14 pcs, M2.0x6.0 Zinc Plated, Wafer Head, Black color.
7. MTP Dust Cover: 1 piece, PC, Black color.
8. Screw: 2 pcs, M3.0x4.0/4.5mm Zinc Plated, Wafer Head, Black color.
9. Harness Patch Cord: 1 pcs, MTP(Male) to LC G657A2 12C Patch cord 30cm.

D Performance :

- a. Dimension: 1.18" x 3.59" x 5.12"
(30.0 x 91.1 x 130.0mm)
- b. Weight: 0.40kg.
- c. Surface Finished: Painted, BK(RAL9005)

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING		23.FEB.2013		YMN				
	CHECK		23.FEB.2013		DAY				
	APPROVAL		23.FEB.2013		JAIMY				
			DATE		NAME		FA2022		
SCALE		1/2 (A4)		UNIT		mm		DES.: A&C Type Standard G657A2 LC 12P MTP LGX cassette	
		DRAWING NO.		G657A2 LC 12P MTP LGX cassette(SA1)					
		DRAWING CLASSIFICATION		S		SHEET 1 OF 2			

