


MACNM-G90 / MACNM-G92 (HDMI)
MACND-G90 / MACND-G92 (DVI)
MACNA-G90 / MACNA-G92 (VGA)
Extra Console Box (USB + Giga LAN)



► Specifications

Function	MACNM-G90	MACNM-G92
	MACND-G90	MACND-G92
	MACNA-G90	MACNA-G92
Signal Input	Ethernet + USB	
Signal Output	HDMI (Female)	
	DVI-D (Female) + Audio Jack (Speaker+MIC)	
	HDB15 (Female) + Audio Jack (Speaker+MIC)	
Keyboard Connector	USB A-Type x 1	
Mouse Connector	USB A-Type x 1	
Max. Resolution	1920x1080	1920x1200 2048x1152
LED	Dual Color x 1+ Blue x 1	
Connector (In)	RJ-45 + USB-B	
Connector (Out)	HDMI (Female)	
	DVI-D (Female), 3.5-mm jack x 2 for Audio	
	HDB15 (Female), 3.5-mm jack x 2 for Audio	
LAN	1000BASE-T	
Enclosure	Metal	
DDC2B Support	Yes	
Power Consumption (Max.)	DC 5V, 800mA	
Dimensions H x W x D (mm)	24 x 75 x 102	

► Connection Pattern

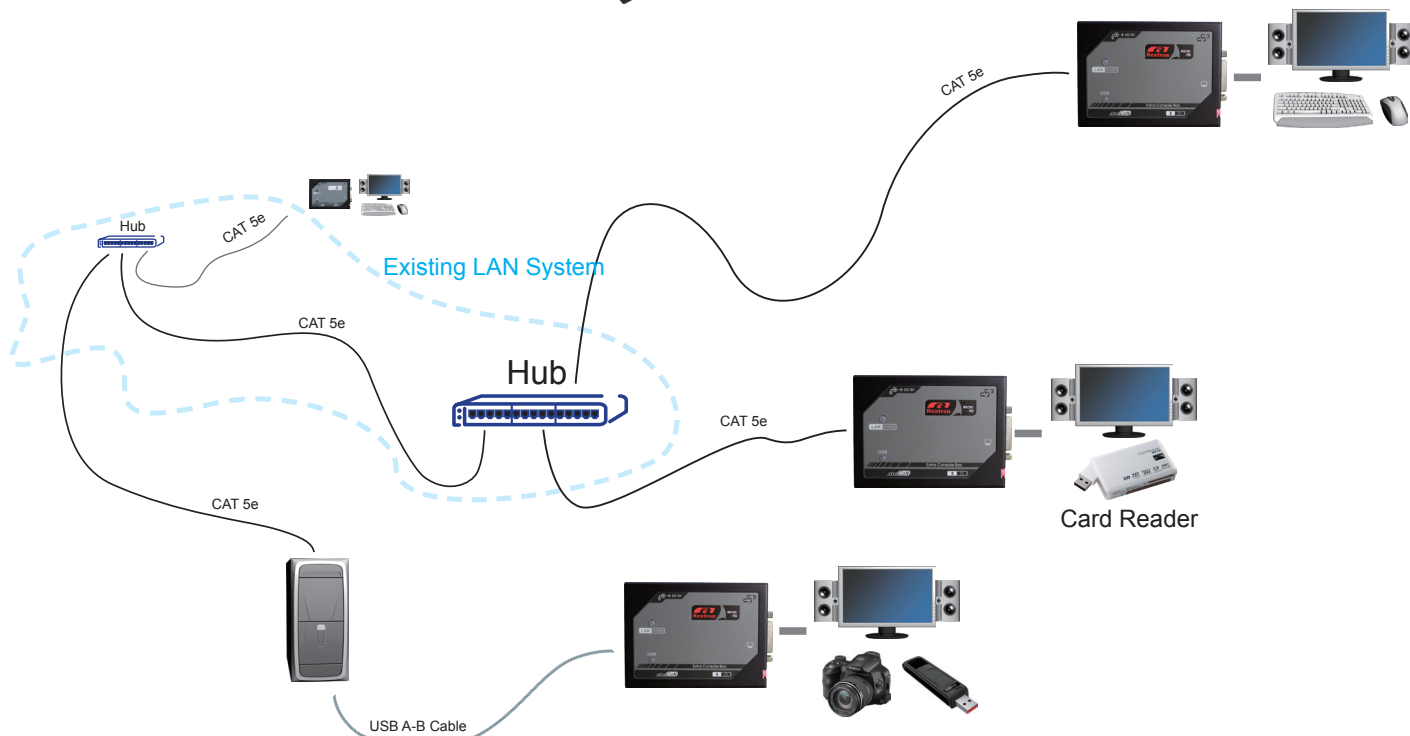

► Features

- Easily add the extra console(s) via the USB or the exiting LAN system without additional wiring.
- Add up to 4 extra consoles allowing 4 + 1 users to share one computer at a time; the control power is on first-come, first-serve basis.
- Unique Multi-users network configuration, negotiable controlling access setting.
- Enable USB peripherals sharing via network connection.
- Support HDMI/ DVI/ VGA display. (depends on model)
- Perform the multiple windows on the multiple displays and increase productivity like never before.
- Demonstrate media files and DVDs in either extend or clone mode.
- Support the high resolution up to UXGA (1600 x 1200)/Full HD (1920 x 1080) and 2048 x 1152 for certain models.
- Fully support Windows 2000 SP4, Windows XP SP2 or SP3, Windows Vista SP1/SP2, Windows 7.
- Fully support Intel-based Mac OS 10.4/10.5 for the video extending via USB connection.
- Ideal for applications on public broadcasting, exhibits, retail stores, courtrooms, etc.