


| | | | | |
|------|----------|-------------|-------|----------|
| REV. | ECN. NO. | DESCRIPTION | ENG | DATE |
| A | | ISSUED | Henry | 25/10/11 |

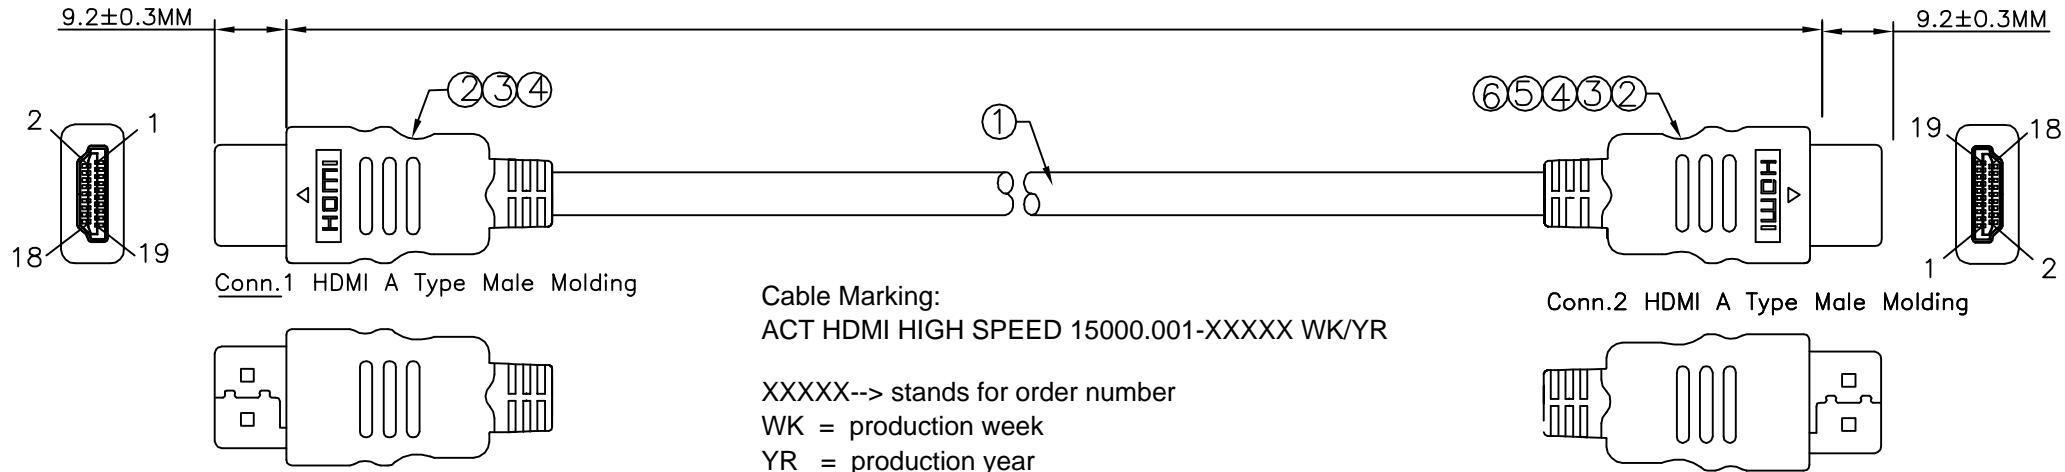


Cable Marking:
 ACT HDMI HIGH SPEED 15000.001-XXXXX WK/YR

XXXXX--> stands for order number
 WK = production week
 YR = production year

Electrical Test:


- 100%Test(Open, short, miss wire)
- Contact Resistance: 2 ohm max.
- Insulation Resistance: 10M ohm min.
- Hi -pot:300V DC/10ms
- Electrical voltage: 100v AC/Minute, 1mA
- RoHS compliant

| | |
|--------|-------|
| AK3790 | 1 m |
| AK3791 | 1.5 m |
| AK3792 | 2 m |
| AK3793 | 3 m |

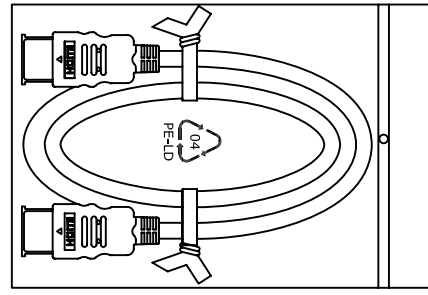

Package: 1pcs / per PE bag

Pin Assignment

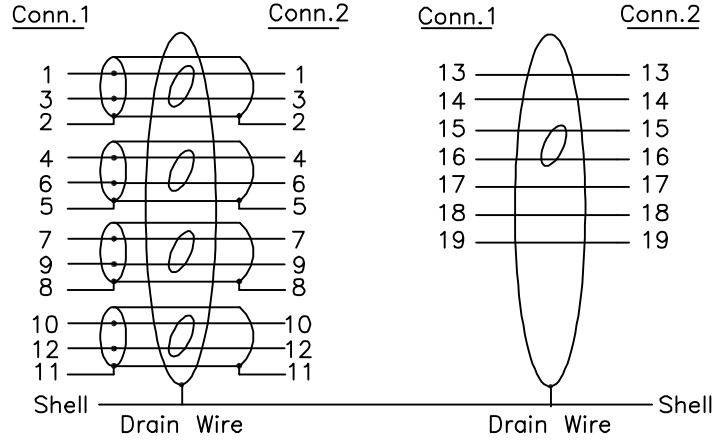

| | | | |
|-----|--|------|------|
| ④ | Outside Molding: 45P PVC PMS: Black | 20 | g |
| ③ | Inside Molding: PE | 6 | g |
| ② | HDMI 19P Male, Shell Gold Plated, Insulation: Black | 2 | Set |
| ① | HIGH SPEED HDMI CABLE (1/0.25BC*1P+D:1/0.25BC (Insulation layer) + AL)*4P +1/0.25BC*1P+1/0.25BC*5C+ADB64/0.12AM OD:6.0MM+/-0.2MM | L | M |
| NO. | DESCRIPTION | Q'TY | UNIT |

RoHS Compliant

| | | | | |
|---|------------------------------------|--------------|----------|-------------------|
| GENERAL TOLERANCE | ANGLE TOLERANCE | DRAWN | DATE | AC |
| .X ±0.50 .X ±0.25 .XX ±0.15 .XXX ±0.05 | X° ±2.0° X° ±1.0° .XX° ±0.5° | Henry | 22/10/12 | |
| MATERIAL SEE BOM | | CHECKED | DATE | TITLE: HDMI CABLE |
| FINISH SEE NOTES | | PART NUMBER. | | |
| SCALE N/A | UNIT mm | APPROVED | DATE | DRAWING NO. |
| SHEET 1 of 1 | | SIZE A4 | | REV. A |