



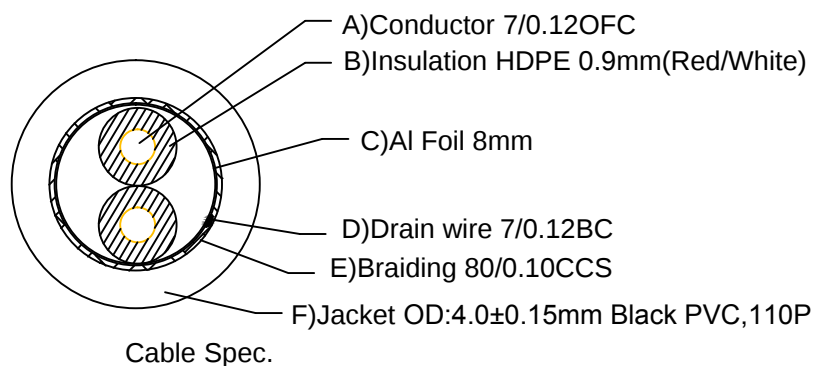

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF **ZONG INTERNATIONAL LTD.** AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF **ZONG INTERNATIONAL LTD.**

RoHS Compliant a

REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2019/04/16	

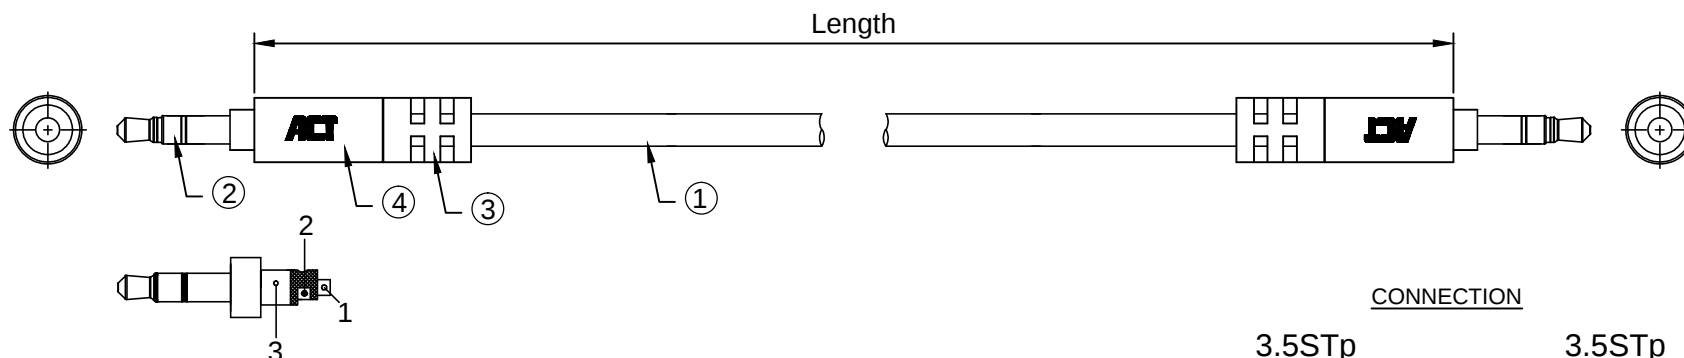

Cable Spec.

Item No.	Length(m)
AK6240	2.0m
AK6243	3.0m
AK6244	5.0m
AK6246	10.0m
AK6247	15.0m


CONNECTION

3.5STp	3.5STp
1 ————— White	1
2 ————— Red	2
3 ————— Drain Wire	3

Remark:

- 1.100% Open/Short Test
2. Conductive Resistance: 2ohms MAX
3. Insulation Resistance: 10M ohm MIN.
4. The product is Reach/RoHS compliant.

④	Shell	Copper shell, Black	2PCS	
③	External Mold	Outer Mould 30P PVC, Black	2PCS	
②	Connector	3.5 Stereo Male, Gold-Plated	2PCS	
①	Cable	(7/0.12mmOFC+PE)*2C+AL+80/0.10CCS+PVC 110P OD:4.0mm,Black		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK



ZONG

ZONG Cable Technology Co., Ltd.
中广视讯线缆技术有限公司

ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	3.5mm Stereo Male to Stereo Male		PAGE NO 1/1
		DATE	2019/04/16
APPROVAL		CHECKED	
		DRAWN	