

Warranty

To view the product warranty, use the following link or QR code:

<https://atlona.com/warranty/>



English Declaration of Conformity

The English version can be found under the resources tab at:

<https://atlona.com/product/at-cap-fc110/>



Chinese Declaration of Conformity 中国RoHS合格声明

由SKU列出於:

<https://atlona.com/about-us/china-rohs/>



US International
atlona.com • 408.962.0515 • 41.43.508.4321

© 2022 Atlona Inc. All rights reserved. "Atlona" and the Atlona logo are registered trademarks of Atlona Inc. All other brand names and trademarks or registered trademarks are the property of their respective owners. Pricing, specifications and availability subject to change without notice. Actual products, product images, and online product images may vary from images shown here.

Captivate™ 4K ePTZ Auto-Framing Camera
AT-CAP-FC110



The Atlona **AT-CAP-FC110** is an enterprise-grade ePTZ camera ideal for use in video conferencing, distance learning, and other applications in huddle rooms and small to medium-sized meeting spaces. This camera is part of the **Captivate™ Series** developed specifically for unified communications (UC) applications, and features a USB 3.0 Type-C (USB-C®) interface for video and audio. The CAP-FC110 can be used with the Omega™ Series, AT-USB-EX100-KIT, and OmniStream™, or interfaced directly with a PC. This camera offers a 110° wide horizontal field of view and features electronic pan, tilt, and zoom capabilities, as well as an auto-framing functionality that reframes the camera based on detection of up to six participants. The CAP-FC110 delivers high-quality imaging with video resolutions up to 4K@ 30 Hz, and features a 2-microphone array with a 5 meter (16 foot) audio pickup range. It can be installed on a flat-panel display or desktop monitor with an adjustable mounting clip, and features a 1/4-20 UNC standard screw thread for a tripod or other camera mount.

Package Contents

- 1 x AT-CAP-FC110
- 1 x IR remote control
- 1 x USB cable
- 1 x Installation guide



IMPORTANT: Visit <http://www.atlona.com/product/AT-CAP-FC110> for the latest firmware updates and documentation.

Notes


Presets

Up to three presets can be programmed using the number keys (1, 2, and 3) on the IR remote control.


1. Press and hold the number key for more than three seconds to assign the current camera settings to a preset.
2. Press and release the number key to recall a programmed preset.

On-Screen Display (OSD)

The AT-CAP-FC110 includes an in-camera OSD, allowing access to various other camera settings. Refer to the AT-CAP-FC110 User Manual for more information.

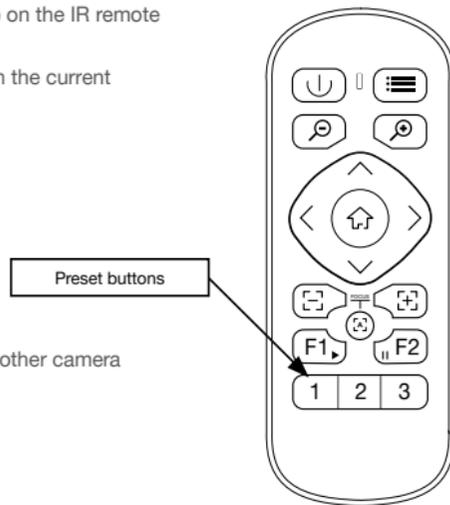


Front Panel Description

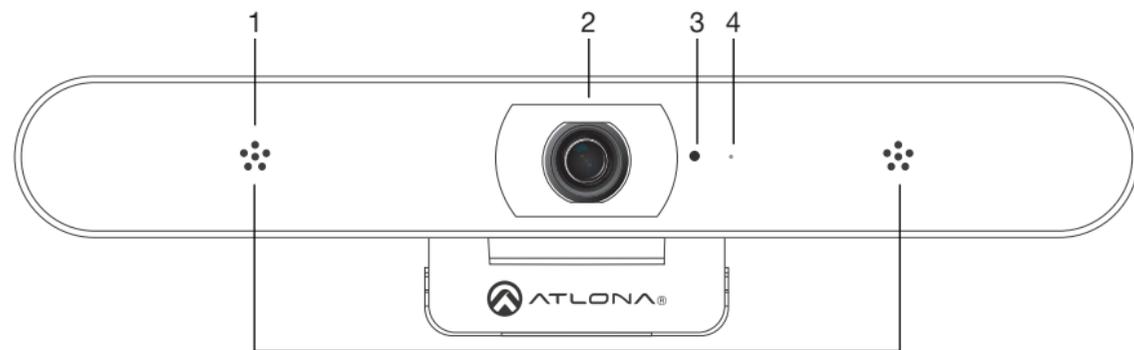

- | | |
|---|---|
| <p>1 Microphone
 Receives audio information and transmits it over the USB cable.</p> <p>2 Camera Lens
 Receives visual information and transmits it over the USB cable.</p> | <p>3 IR Sensor
 Receives commands from the included IR remote.</p> <p>4 LED indicator
 This indicator will glow blue when the camera is in use.</p> |
|---|---|

Bottom and Side Panel Description

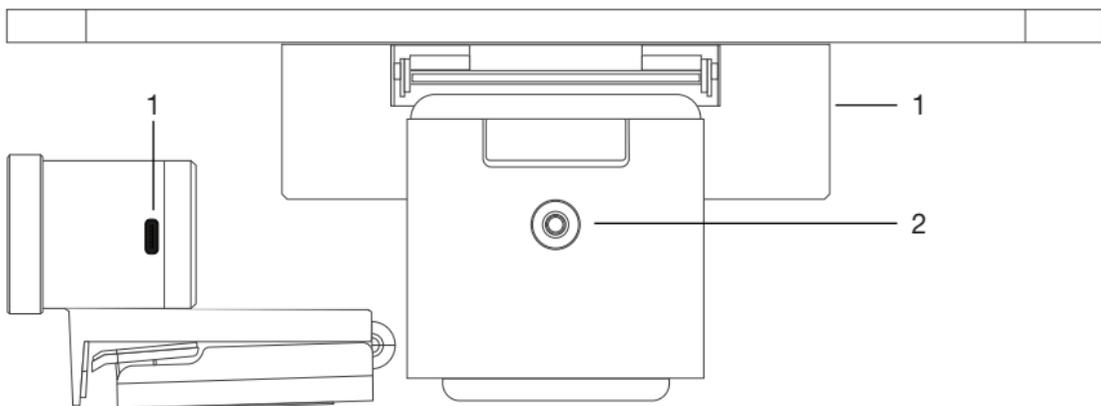


- 1 USB Port**
 Connect the included USB cable from this USB 3.0 port to the computer.


- 2 1/4" UNC Thread**
 Attach the camera to a tripod or other camera mount using this hole.

Auto Framing


The AT-CAP-FC110 supports Auto Framing, which will center all participants in the camera frame. To enable this feature, press the **F1** button on the included IR remote control.

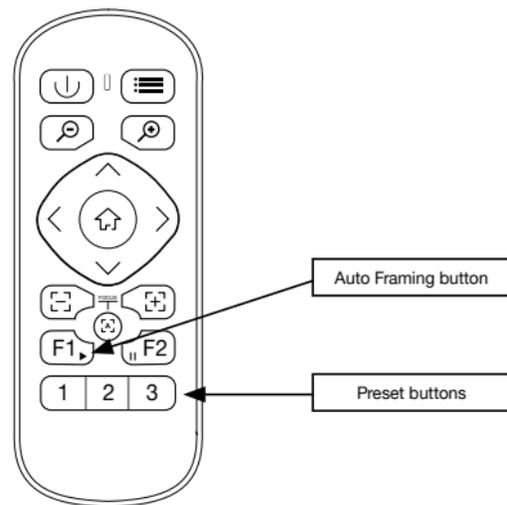

Auto Framing Inactive




Auto Framing Active




Pan, Tilt, and Zoom

The AT-CAP-FC110 supports EPTZ (Electronic Pan-Tilt-Zoom) control. When the camera is activated, the included IR remote is used to control these features. The illustrations below show the buttons used and their effect on the camera.

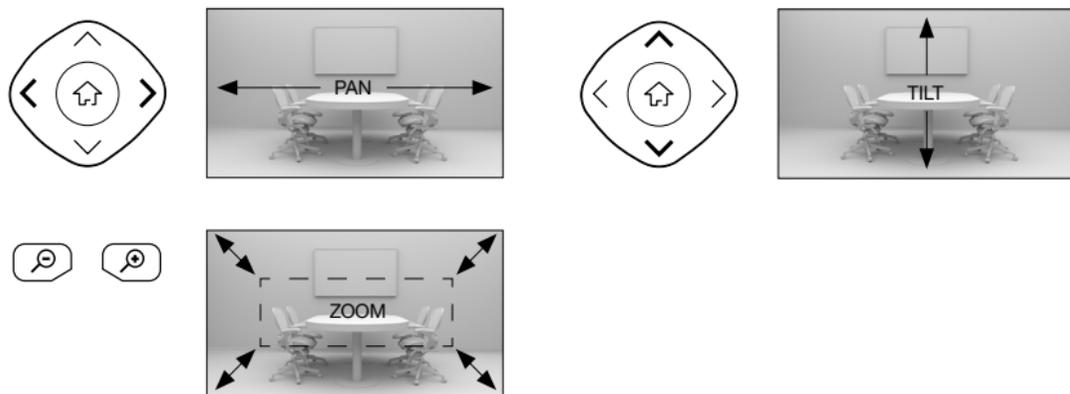

NOTE: When the AT-CAP-FC-110 is at minimum zoom (1x), the pan and tilt features will not function. Maximum zoom is 4x.

IR Remote Control

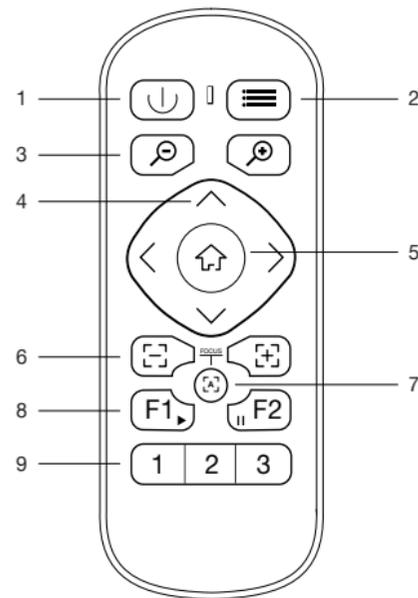

- 1 Power**
Press this button to turn on or turn off the camera.
- 2 Menu**
Press this button to display, exit, or return to a previous sub-menu. Refer to the User Manual for more information.
- 3 Zoom**
Press these buttons to zoom in or zoom out of the current viewing area.
- 4 Direction**
When the OSD displayed, press these buttons to move and select the desired option. If the OSD is not displayed, pressing the < or > buttons to pan the camera left or right. Press the v or ^ buttons to adjust the tilt of the camera up or down.
- 5 HOME**
When the OSD is displayed, press this button to confirm the current selection. If the OSD is not displayed, pressing this button will return the viewing area to the default position (all zoom and panning functions are returned to normal).
- 6 Focus**
These buttons are reserved for future use.
- 7 Autofocus**
This button is reserved for future use.
- 8 Auto Framing**
Press **F1** to enable auto-framing. This function will keep the user's face centered in the screen. Press **F2** to disable auto-framing.
- 9 Presets**
Press these buttons to set or call a preset.

Installation

1. Open the hinge bracket and to mount the camera on top of the display.
2. Connect the USB cable from the USB Port on the camera to a USB 3.0 port on the computer.
3. Once the camera is connected to the computer, the LED indicator on the front panel will be blue for 10 seconds, then turn off. When the camera stream is activated, the LED indicator will be blue until the stream is terminated.
4. Remove the battery compartment cover, on the back of the included IR Remote Control, and insert one "AAA" battery (not included). Close the battery compartment.



Front Panel LED Indicator

The LED indicator on the front panel of the unit provides basic information on the current status of the AT-CAP-FC110.

LED	Description
Solid blue 	Unit is active and is streaming content.  NOTE: Once the camera is initially connected to the computer, the LED indicator on the front panel will be blue for approximately 10 seconds, then turn off.
Off 	Unit is not powered. <ul style="list-style-type: none"> • Camera is not activated or streaming content. Enable the camera from within the conferencing software. • Check to make sure the USB cable is connected from the USB port on the AT-CAP-FC110 to the computer. • Check that the USB cable, between the AT-CAP-FC110 and the computer, is secure. • Try a different USB cable.