


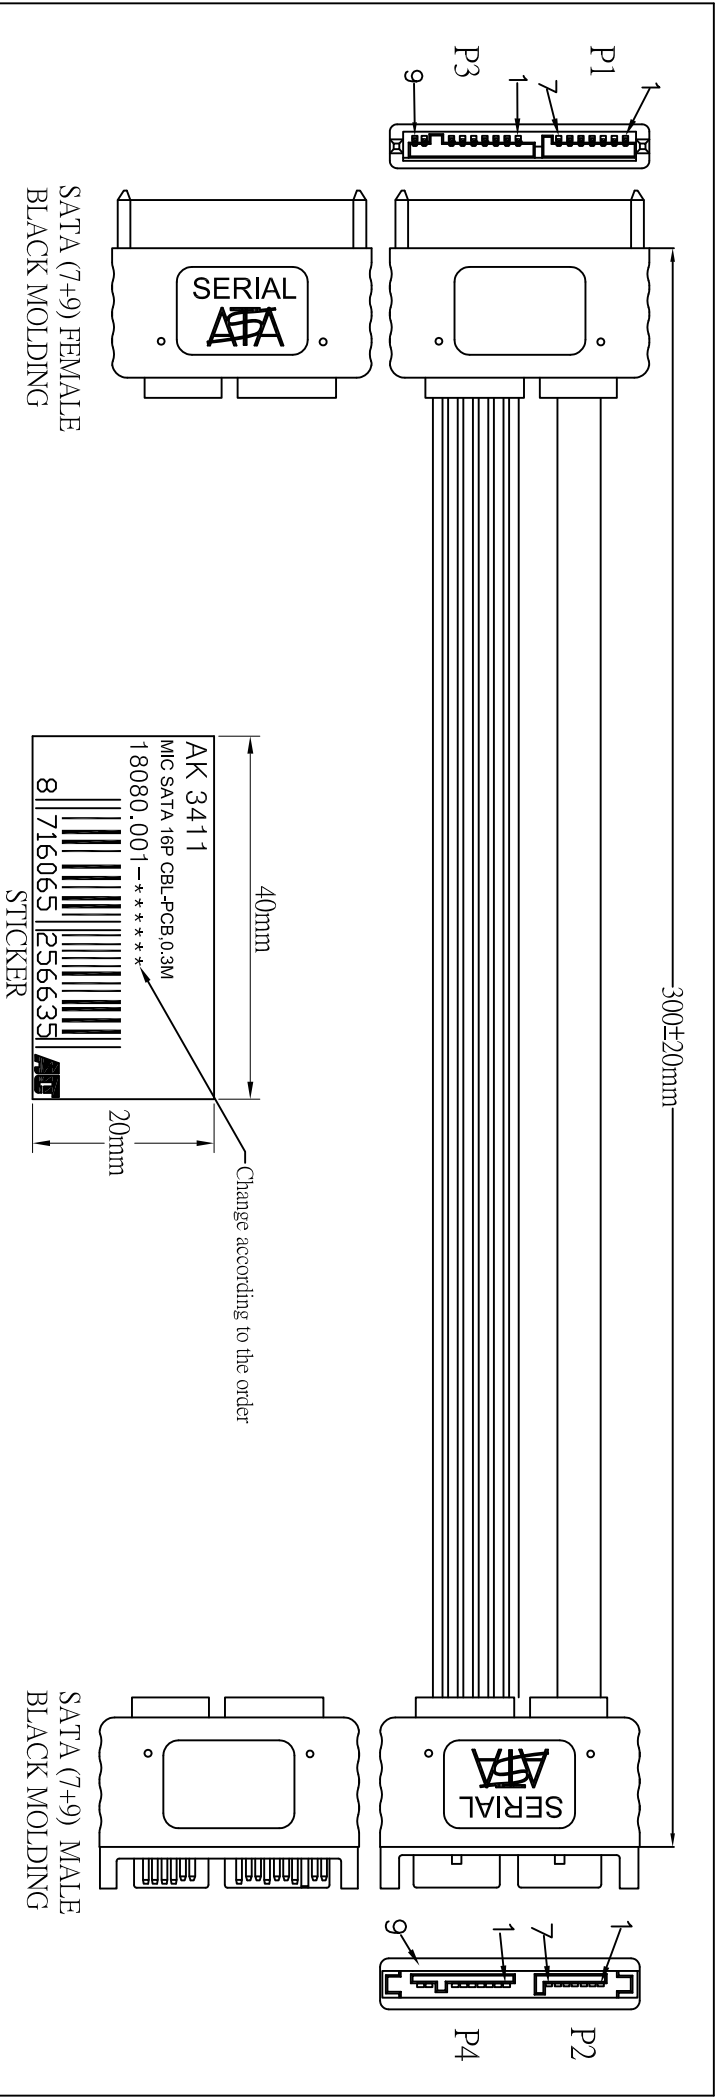

NOTE :

- 1.CABLE:A:UL 1007 22AWG,BLACK*4PCS,RED*1PCS/YELLOW*1PCS COLOR,PVC JACKET.
UL2725,(26*2C+AL/MY+D*2)*2F,OD=2.4*8.0mm,RED FLAT CABLE,PVC JACKET.
- 2.LENGTH:300mm
- 3.CONNECTOR:SATA(7+9) MALE*1PCS(BLACK),SATA(7+9)FEMALE*1PCS.
- 4.CONTACTS:

P3	1+2	3+4	5+6	7	8	9
P4	1+2	3+4	5+6	7	8	9
	YELLOW	BLACK	RED	BLACK	BLACK	BLACK
P1	1+4+7	2	3	5	6	
P2	1+4+7	2	3	5	6	

5. OPEN/SHORT TEST: 100% TEST.
CONTACT RES:10Ω(MAX)
INSULATION:5MΩ/MIN.
HI-POT TEST:DC300V/10MS.

Company	IBV	Goods Code	Draw	FC001	W/F	Date	2010.03.18	1PCS/PE BAG(0.06*100*200+STICKER		
ITEM NO.	AK3411	Drawing Evidence:	Check			Date		D		20111202
Goods NO.			Approval			Date		C	AMEND TYPING MISTAKE	K-002
Original NO.	S-*****	Unit(mm)				Date		B	Adding packaging info	100419(cy)
								VER. A	REVISE	Date

RoHS Compliant

