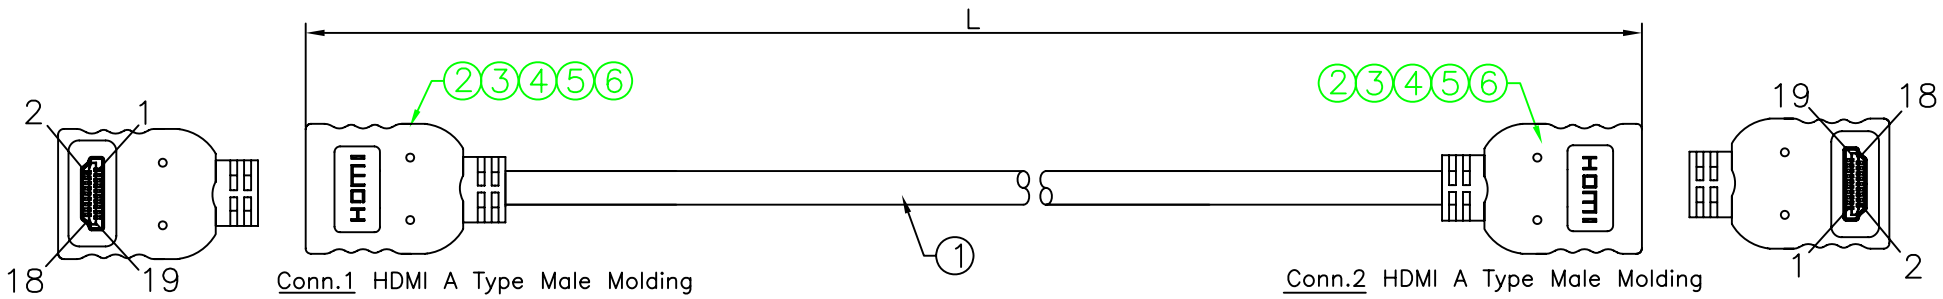



Back Side (90°angle)



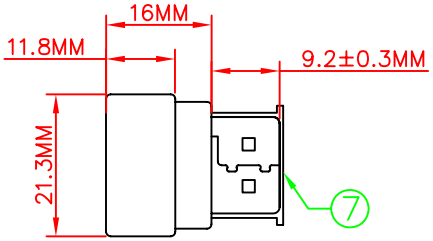

Back Side (90°angle)

Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 3 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot:300V DC/10ms

Tabel:

Length	Part No
500±20MM	AK3680
1000±30MM	AK3681
1500±30MM	AK3682
2000±40MM	AK3683
3000±40MM	AK3684

PIN Assignment

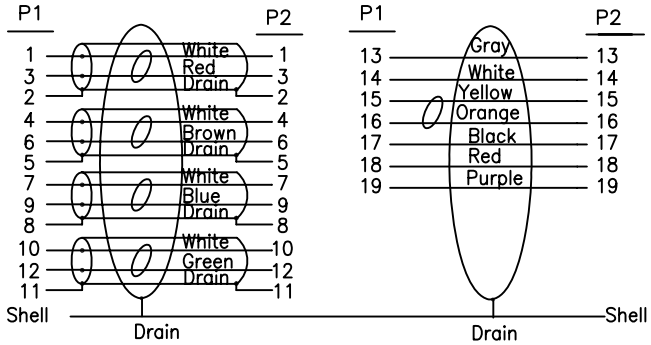

NO.	DESCRIPTION	Q'TY	UNIT
⑦	HDMI Transparent Dust Cover	2	pcs
⑥	Outside Molding:45P PVC PMS:Black	20	g
⑤	Inside Molding:PE	3	g
④	H.S.T ø1.5*16mm Black	2	pcs
③	H.S.T ø2.5*10mm Black	8	pcs
②	HDMI 19P Male Shell Gold Plated,Insulation:Black	2	pcs
①	UL20276[30AWG(7/0.10TC)*1PR+EAM)*4C+30AWG(7/0.10TC)*1PR+ 30AWG(7/0.10TC)*5C+AEB 50%AL OD:5.5MM BLACKMARKING:HIGH SPEED HDMI ...	L	m

REV.	DESCRIPTION	DATE

TOLERANCE	INCHES	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

TITLE: HDMI AM TO AM 30AWG Gold Plated

DRAWN BY	Egan	CUSTOMER :	
		CUSTOMER NO.:	
CHECK BY		SCALE	NONE
		UNIT	MM
APPD BY		DATE	2015.11.18

DRAWING NO.: REV. A 1/1